vogel's®
Professional

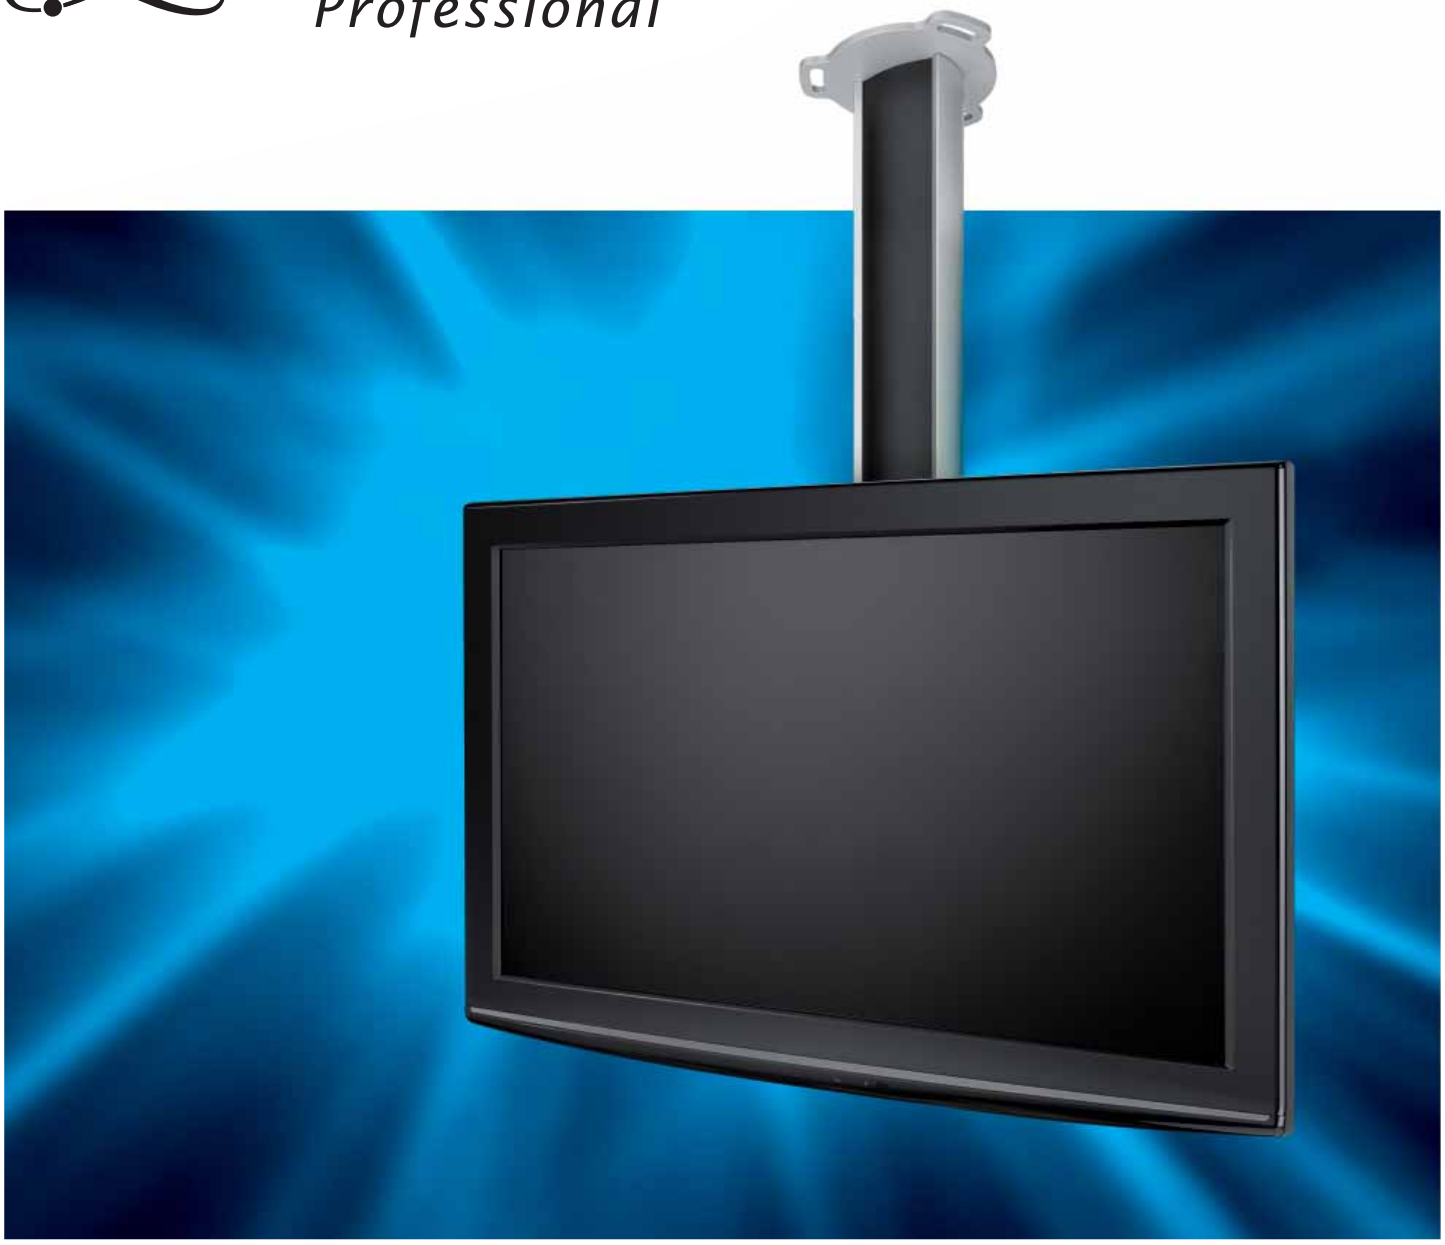

PRO-AV CATALOGUE 2010|2011

VOGEL'S – PROVIDER OF COMPLETE MOUNTING SOLUTIONS

The professional market will continue to grow this year. Vogel's Professional is growing right alongside it. Over the past several years, Vogel's has made significant new investments in this market segment. The results are exciting new products. That's no surprise coming from Vogel's, the Professional Expert. For the last 35 years, we have been working hard to simplify the placement of electronic equipment in professional and public areas for AV and electro-technical installers. Our strategic focus on systematic innovation and high quality design has enabled us to produce winner after winner for this demanding market.

Video conferencing
Video conferencing is becoming more and more popular. Especially since it saves on travelling costs, the environment and enables more frequent, cost-effective meetings. Vogel's Professional offers a range of products that can be used to create your own video conference system or setup. Because of the universal design of our products they can be used for a wide range of display sizes. Therefore we can offer a solution for almost every situation.

Serving the Pro AV Installer
More and more Vogel's is serving the Pro AV installer with complete solutions with exactly the benefits your customers are asking for. Extending our products in different sizes and differentiating features you can be sure there is always a solution for your AV challenge.

Let's keep growing together.

Gerdi Vogels
Managing Director

PRODUCT NEWS

New range of modular ceiling solutions: Connect-it
Connect-it Series is a complete new range of modular ceiling solutions for small to medium sized displays. Connect-it consists of a limited number of products that can be combined into more than 80 solutions. That means the Connect-it range can provide a solution for almost every situation. (read more on page 10)

Video conferencing dual display adapter
Vogel's introduces a stylish video conferencing solution for 32 to 52 inch flat displays. The PFA 9050 is a video conferencing accessory for the PFF 2410 floor stand or PFT 2510 trolley. Because of the universal design, this dual display adapter can be used for a wide range of display sizes and brands. (read more on page 47)

Projector lift system with 7.2 metre drop down length
PPL 7575 is the latest and largest model in our line up of projector lift systems. With a drop down length of 7.2 metres and lifting capacity of 180 kg / 400 lbs it is the largest projector lift system available on the market. (read more on page 72)

FLAT DISPLAY MOUNTS 8
Ceiling mounts 10
Connect-it 10
Modular Series 17
Wall mounts 25
Modular Series 26
PFW 5000 Series 30
PFW 3200 Series 36
VFW Series 38
6000 Series 40
Remote-controlled 45
Trolleys & floor stands 46
TVskin 57

PROJECTION 60
Projector mounts 61
Short throw 68
Lift systems 72

GENERAL
One-stop shop 4
Market research 5
Internet 6
Quality 7
Product configurator 8
Vogel's importers 78
Article index 80
Product overview 81

WHAT MAKES VOGEL'S PROFESSIONAL SO SPECIAL?

Design/styling
Vogel's stands out from the competition by its unique and timeless design. It comes as no surprise that Vogel's continues to win design awards all over the world and of course the beautiful design is combined with very sophisticated functionality.

Quality and safety
All Vogel's products comply with the highest industry standards for quality and safety. Only the best quality materials are used. All products for professional use are tested to carry at least 5 times the specified weight.

Innovative
Time and time again Vogel's introduces innovative new designs for both existing and new applications. The 'Glider' electronic wall mount, Vogel's TVskin®, a range of Short Throw projector mounts and the 'Brand your stand' trolley are just a few of Vogel's newly introduced products from the past year.

Provider of complete solutions
A complete range of mounting-solutions for both projectors and flat displays. From simple to advanced. From static to electronically operated. Vogel's has a solution for every AV mounting application. A one-stop shop.

PRODUCT DEVELOPMENT

In the past 35 years an extensive team of industrial designers and product developers has built up a vast amount of experience and specialist knowledge when it comes to materials, functional requirements, ergonomics and production processes. All this knowledge comes together to test the feasibility and consider all possible options, before a project is started. The next step is for the design team to develop several concepts. The foundation of the design is always based on the distinctive Vogel's design, quality and innovation. A prototype of the best concept is then developed and exhaustively tested using the most advanced methods and finally leads to the actual production models.

CONTINUOUS MARKET RESEARCH

FLAT DISPLAY TILT ANGLES

Vogel's continuously undertakes market research in order to determine the most practical and efficient application of AV equipment.

The tilt angle for a flat display is an important part of flat displays used in public environments. The correct tilt angle reduces unwelcome light reflection from surrounding light sources. Mounting height, viewing distance, height of the viewing public are indicators used to determine the correct viewing height and angle.
By applied research Vogel's products can be adjusted optimally to practical use.

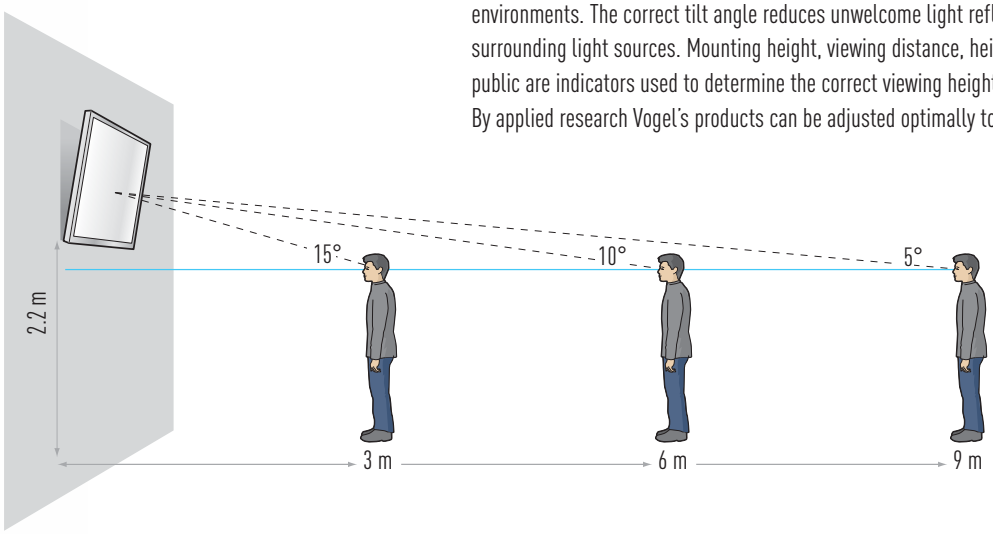

Optimal viewing angle in relation to distance and flat display height

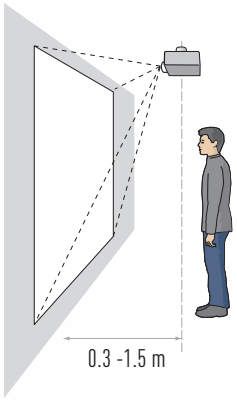

Short throw projector

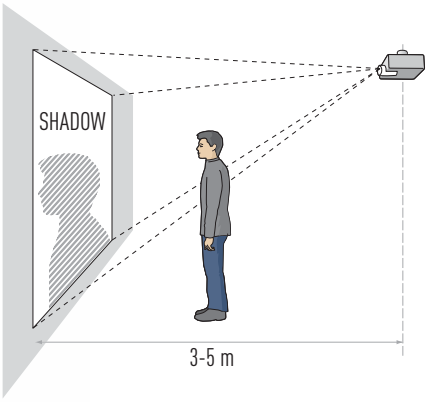

Conventional projector

SHORT THROW PROJECTORS

A new development in the domain of projectors is the Short Throw projector. In this area Vogel's has also undertaken extensive research at the very early stages, getting input from the Pro AV installers, in order to reach the optimal solution. Short Throw projectors can be placed at a very short distance (up to several decimeters or inches) from a projection screen or (interactive) whiteboard. This is particularly applicable in the fast growing education market. The major advantages of Short Throw projectors are that a teacher is no longer standing in the light of the projector and thus no longer casting a shadow which can interfere with the projection. The projector is mounted on the wall above the projection screen. Vogel's is fully prepared for this development with a new, complete range of Short Throw projector wall mounts.

Time saving assembly
Aligning a Short Throw projector is a time consuming job. Vogel's new range of Short Throw wall mounts offers the perfect solution. Precision adjustment is possible by allowing horizontal, height, depth and fine tuning which makes the installation of a Short Throw project quick and easy.

More details about these new mounts can be found on page 68.

HOW VOGEL'S INTERNET APPLICATIONS ARE WORKING FOR YOU

Take advantage of Vogel's Professional experience and know-how. Here you will find professional tips that will save you time and ensure the best results for your projects.

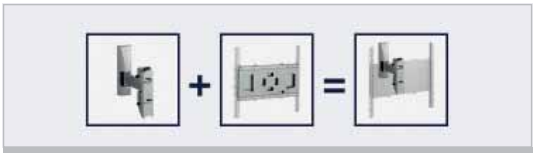

Product configurator

Vogel's Professional product range consists of an extensive number of modular products. It is possible to compose a solution for nearly every application. You can locate the "Product Configurator" in both the catalogue (page 8-9) and on the Vogel's website that will help you quickly find the correct solution for your mounting application.
www.vogels.com/professional

Flatscreenfitter

We have a mounting solution for virtually every flat display. Simply select the brand and type of equipment to see what solutions are available. Please check our website for information on the specific mount that fits a screen.
www.flatscreenfitter.com

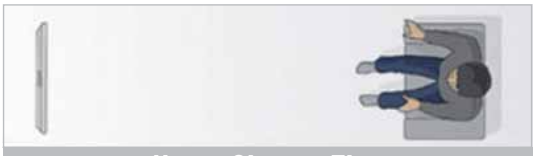

Home Cinema Tips

We provide practical advice for selecting and arranging AV equipment to get the most out of it. Please check our website **www.homecinematips.com**

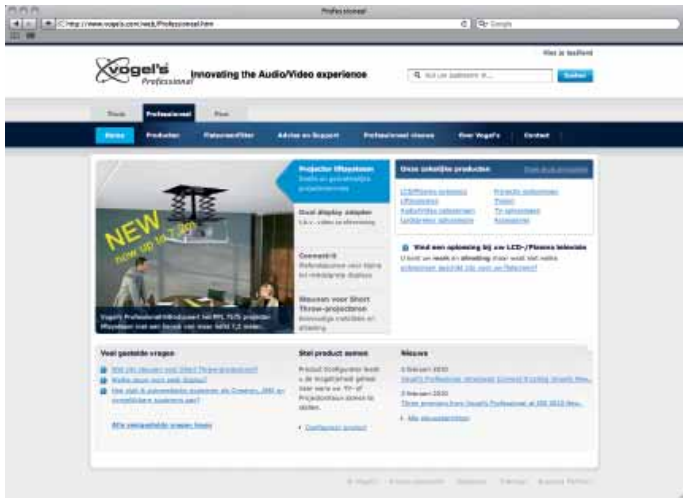

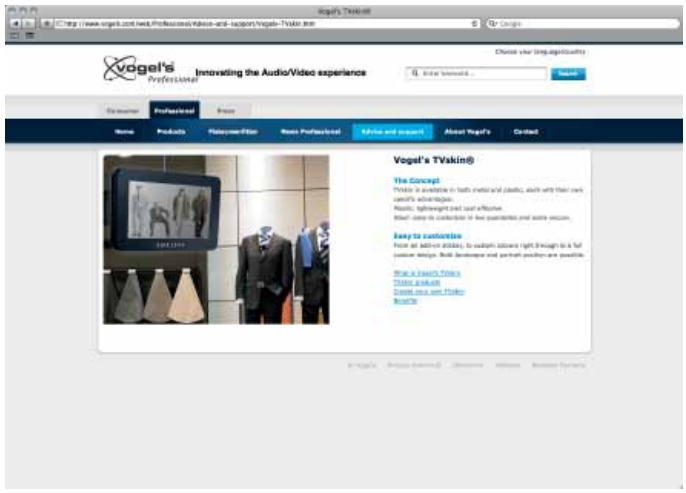

Please visit our website www.vogels.com/professional or www.vogels.com/tvskin

VOGEL'S – THE PROFESSIONAL EXPERT

VESA
VESA is the worldwide standard for mounting flat displays.

VESA classification applicable to Vogel's products:
- **VESA MIS-D** 12 - 22.9" screen size. Mounting holes 75 x 75 mm and 100 x 100 mm
- **VESA MIS-E** 23 - 30.9" screen size. Mounting holes 200 x 100 mm (200 x 200 mm)
- **VESA MIS-F** ≥ 31" screen size. Mounting holes in variable pattern, horizontal max. 1200 mm, vertical max. 700 mm on flat back

Special VESA adapters
A few flat displays still do not have VESA standard mounting. Vogel's has developed a special VESA adapter for some of these models. Check our website for details.

Global specialist
For 35 years, Vogel's has been the global specialist in mounting solutions for AV equipment. Vogel's products have consistently proven their worth in locations around the world. From major airports and shopping centres to football stadiums and hospitals.

Innovative design and technology
Vogel's AV equipment seamlessly integrates technology, safety and the very best design. Vogel's has become a market leader through a constant flow of innovations. These include our patented CIS® Cable Inlay System, the Autolock® locking system and the use of aluminium.

Quality and safety guaranteed
Quality and safety are the number one priorities in all of Vogel's products. Safety is extremely important and is often a pre-requisite, particularly for professional use in public buildings. The strict TüV/GS requirements with which all Vogel's products comply are your guarantee of this safety.

WHAT DOES TüV-GS MEAN FOR YOU

The "GS" certification standard guarantees the safety of a Vogel's product. All Vogel's products have been thoroughly tested before reaching the market. Products out of the Professional range have been tested to the even stricter "GS" requirement for public use. The "GS" certification standard is awarded TüV. TüV is an independent certification institute for products and production processes who carry out thorough independent safety tests.

Vogel's products have the GS certification standard, to give customers extra proof of the safety of their Vogel's product. All products for professional use are tested to carry at least 5 times the specified weight.

Test situations at Vogel's

FLAT DISPLAY MOUNTS: MODULAR PRODUCTS OVERVIEW

STEPS	MODULAR PRODUCTS FLAT DISPLAY	
	CEILING CONNECT-IT SERIES	CEILING MODULAR MOUNTING SYSTEM
STEP 1 BASE	 PUC 1010 PUC 1030 PUC 1040 PUC 1050	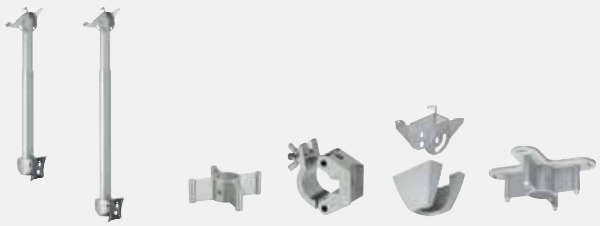 PFC 915 PFC 918 PFA 9005 PFA 9009 PFA 9010 PFA 9020
STEP 2 POLE	80 cm 150 cm 300 cm 80 cm 150 cm 300 cm PUC 2108 PUC 2115 PUC 2130 PUC 2308 PUC 2315 PUC 2330	150 cm 300 cm 80 cm 30 cm PFA 9003 PFA 9004 PFA 9015 PFA 9016
STEP 3 TURN/TILT UNIT		For back-to-back or sky mounting PFA 9030 PFA 9001
STEP 4A INTERFACE	PFI 3010 PFI 3020 PFI 3030 PFI 3040	*Only for skymounting FAU-D FAU-E*
STEP 4B CUSTOMIZED		

Many of the Vogel's professional solutions can be built up as a modular system. To help you find the components you need and to give a complete overview of all the possibilities, we have created the Product Configurator. Please also visit www.vogels.com/professional

FLOOR

PFA 9011 | PFF 1550 | PFF 1570 | PFF 2410 | PFF 2505 | PFT 2510 | PFF 1500

WALL

PFW 910 | PFW 920 | PFW 930 | PFW 950/952

\+

PFA 9002

\+

FAU 3125 | FAU 3150

TVskin® Cubic / Classic

CONNECT-IT MODULAR CEILING MOUNTS

Vogel's Professional offers a complete new range of ceiling solutions for small and medium sized displays, the Connect-it Series. Connect-it is a modular system consisting of a limited number of products that can be combined into more than 84 solutions. That means the Connect-it range can provide a solution for almost every situation.

The range includes:

- **4 Ceiling plates: PUC 1010, PUC 1030, PUC 1040, PUC 1050**
  The ceiling plates are part of the modular system which enables you to create your own ceiling mounting solution for flat displays. You can easily attach one of the poles with just 1 screw, which saves on installation time.
- **6 Poles: PUC 2108, PUC 2115, PUC 2130, PUC 2308, PUC 2315, PUC 2330**
  The poles are the basis of the Connect-it (modular) system for small to medium sized flat displays. The main features of the poles are: quick and easy installation; large cable management system; stylish design; the pole can easily be cut to length if necessary; easy to customize (23xx Series); multiple displays can be mounted on one pole (23xx Series).
- **4 Interfaces: PFI 3010, PFI 3020, PFI 3030, PFI 3040**
  There are three VESA interfaces available: 75x75/100x100, 200x100, 200x200 mm, which can easily be attached to the poles. The main features are: fast, easy and safe installation by just 1 person, horizontal levelling function, and tilt function. There is one universal interface available which supports non VESA fitments of up to 230x260 mm. It features all the functions mentioned before, but is also adjustable in height and can be used for multiple display mounting.

The key features of Connect-it:

- A solution for almost every situation
- Quick and easy installation
- Cost effective
- Easy to customize
- Stylish design

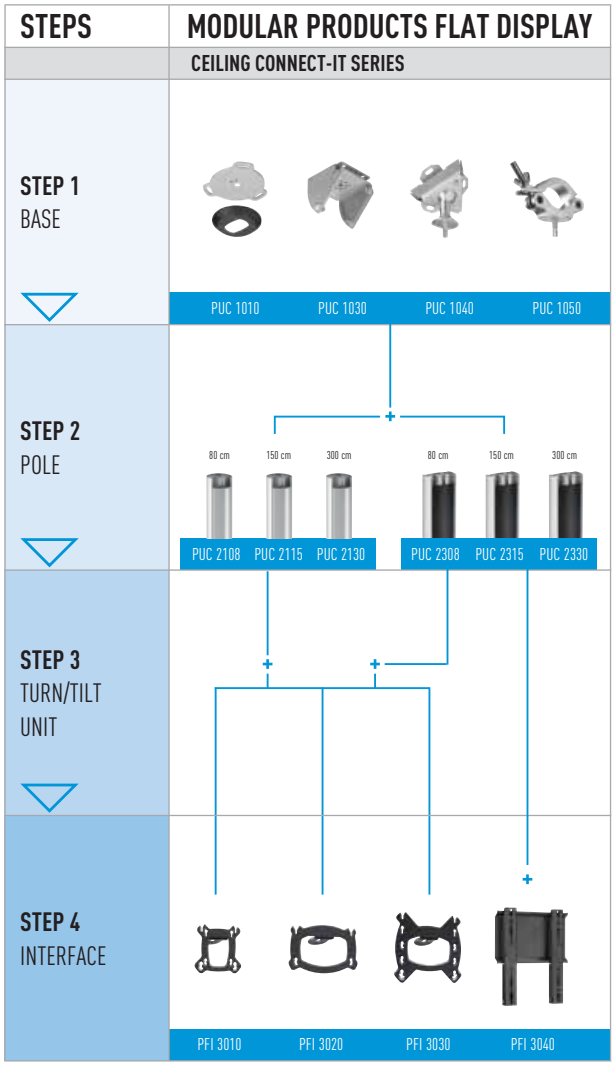

Cable management
The double CIS® (Cable Inlay System), neatly hides all cables.

Easy to customize*
The covers are easy to customize by the user to match a particular interior or housestyle.

* Just add a printed sticker on the removable cover plate.

VESA interfaces
VESA: 75x75/100x100, 200x100, 200x200 mm;
Tilt function 0-10-20°; Horizontal levelling

Universal interface
Non VESA up to 230x260 mm
Height adjustable
Tilt: 0-10-20-30°
Back-to-back mounting
Floor-to-ceiling mounting
Quick and easy install
Optional security

Floor-to-ceiling mounting

PUC 1010
Ceiling plate

MAX. (2x) 30 kg / (2x) 66 lbs (balanced)

- Ceiling plate suitable for flat ceilings
- Cover included

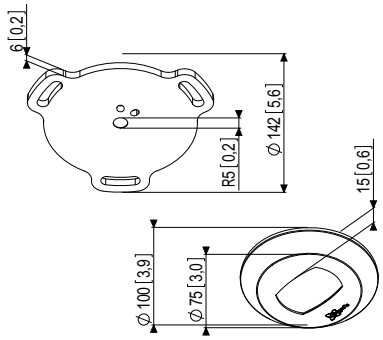

mm [inch]

PUC 1030
Ceiling plate

(2x) 30 kg / (2x) 66 lbs (balanced)

- Ceiling plate suitable for inclined and flat ceilings
- Cover included for false ceilings

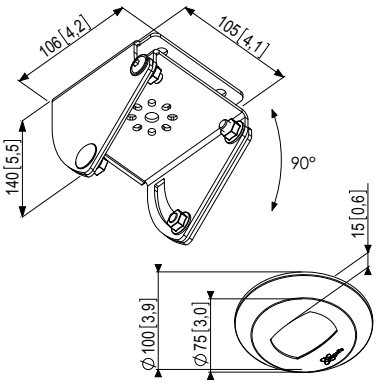

mm [inch]

PUC 1040
Ceiling plate

(2x) 30 kg / (2x) 66 lbs (balanced)

- Ceiling plate suitable for inclined and flat ceilings
- Ball joist, multi directional

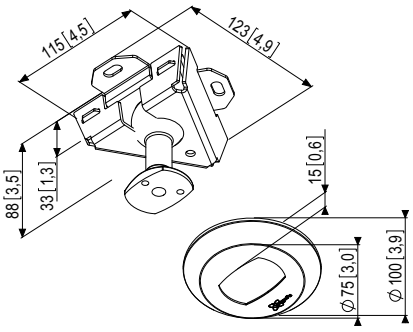

mm [inch]

Type nr.	Max.	Colour	TüV
PUC 1010	(2x) 30 kg / (2x) 66 lbs (balanced)	●	✔P
PUC 1030	(2x) 30 kg / (2x) 66 lbs (balanced)	●	✔P
PUC 1040	(2x) 30 kg / (2x) 66 lbs (balanced)	●	✔P

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PUC 1050
Truss adapter

MAX. (2x) 30 kg / (2x) 66 lbs (balanced)

- Ceiling plate suitable for inclined and flat ceilings
- Ball joist, multi directional

PUC 2108/2115/2130
Basic poles

30 kg / 66 lbs

- Poles PUC 21xx Series in 3 different lengths:
  PUC 2108 (80 cm),
  PUC 2115 (150 cm),
  PUC 2130 (300 cm)
- Double cable management, CIS®
- Aluminium, easy to cut to length



mm [inch]

PUC 2308/2315/2330
Connect-it poles

(2x) 30 kg / (2x) 66 lbs (balanced)

- Poles PUC 23xx Series in 3 different lengths:
  PUC 2308 (80 cm)
  PUC 2315 (150 cm)
  PUC 2330 (300 cm)
- Double cable management, CIS®
- Easy to customize
- Multiple display mounting
- Aluminium, easy to cut to length
- Max. 30 kg / 66 lbs per side

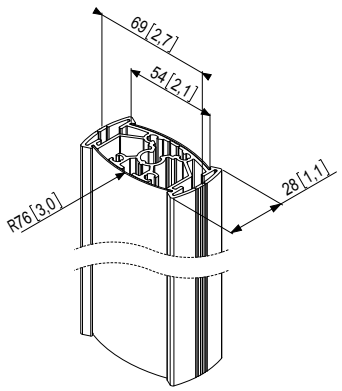

mm [inch]

Type nr.	Max.	Colour	TüV
PUC 1050	(2x) 30 kg / (2x) 66 lbs (balanced)	●	✔P
PUC 2108/2115/2130	30 kg / 66 lbs	●	✔P
PUC 2308/2315/2330	(2x) 30 kg / (2x) 66 lbs (balanced)	◕	✔P

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PFI 3010
Interface

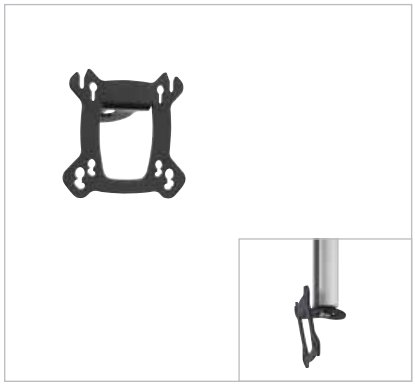

SIZE 38-58 cm / 15-23"

MAX. 30 kg / 66 lbs

●

- VESA: 75x75, 100x100 mm
- Tilt function: 0-10-20°
- Levelling function
- Fits on PUC 21xx and PUC 23xx poles

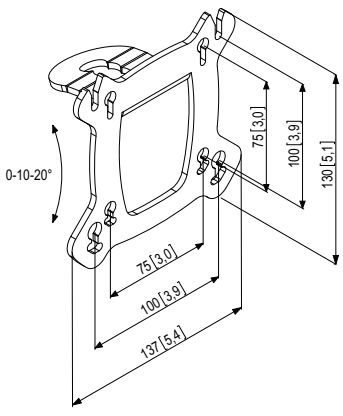

mm [inch]

PFI 3020
Interface

58-81 cm / 23-32"

30 kg / 66 lbs

●

- VESA: 200x100 mm
- Tilt function: 0-10-20°
- Levelling function
- Fits on PUC 21xx and PUC 23xx poles

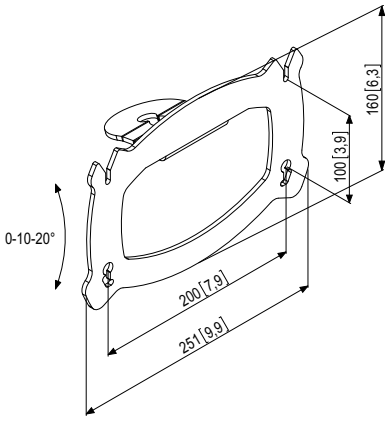

mm [inch]

PFI 3030
Interface

58-81 cm / 23-32"

30 kg / 66 lbs

●

- VESA: 200x100, 200x200 mm
- Tilt function: 0-10-20°
- Max load: 30 kg
- Levelling function
- Fits on PUC 21xx and PUC 23xx poles

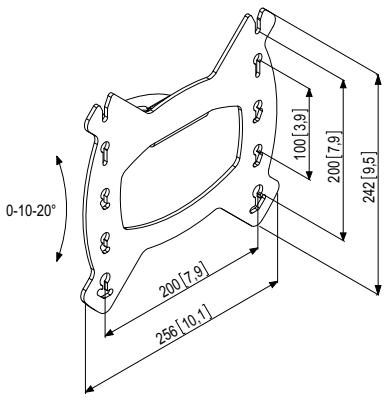

mm [inch]

Type nr.		Max.	Colour	TüV
PFI 3010	38-58 cm / 15-23"	30 kg / 66 lbs	●	✔P
PFI 3020	58-81 cm / 23-32"	30 kg / 66 lbs	●	✔P
PFI 3030	58-81 cm / 23-32"	30 kg / 66 lbs	●	✔P

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PFI 3040
Interface

SIZE 48-81 cm / 19-32"

MAX. 30 kg / 66 lbs

- Non VESA up to 230x260 mm
- Tilt function: 0-10-20-30°
- Max load: 30 kg
- Height adjustable
- Fits on PUC 23xx poles

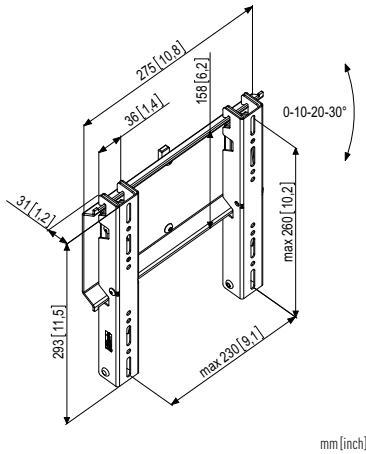

PFA 9100
M5/M8 Insert kit

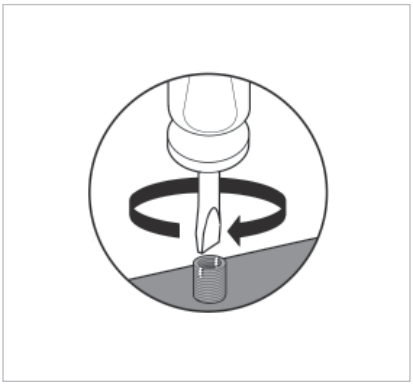

- To reduce M8 holes in a display to M5
- Carton of 10 bags with 4 M8/M5 inserts

PFA 9101
Floor plate

- Combine with Connect-it ceiling plate and pole for a complete floor/ceiling solution.



Type nr.		Max.	Colour	TüV
PFI 3040	48-81 cm / 19-32"	30 kg / 66 lbs	●	✔P
PFA 9100	-	-	●	-
PFA 9101	-	-	●	-

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PUA 9501
Pole coupler

- To couple 2 poles from the Connect-it Series (PUC 2108, PUC 2115, PUC 2130, PUC 2308, PUC 2315 or PUC 2330)

PUA 9502
Stabilisation kit

- Can be used in combination with the poles from the Connect-it Series (PUC 2108, PUC 2115, PUC 2130, PUC 2308, PUC 2315 or PUC 2330).

Type nr.	Max.	Colour	TüV
PUA 9501	-	●	✔P
PUA 9502	-	●	-

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

FLAT DISPLAY MODULAR CEILING MOUNTS

Two complete kits for small flat displays
For small flat displays, 15"–23" size, there are PFC 915 and PFC 918, complete kits including a universal ceiling plate, height adjustable tube, turn & tilt unit and a VESA 100x100 mm flat display interface.

Flexible modular component solutions for medium and large size flat displays.
A range of ceiling plates, extensions tubes, a single and back-to-back turn & tilt unit, universal flat display interfaces and a smart range of accessories are the flexible building blocks to create exactly the ceiling mounting solution you need. The Product Configurator on page 8-9 will help you to configure the solution you need.

	Single flat display	Back to back displays	Fitment min.	Fitment flat max.
Small ≤ 26″	PFC 915 PFC 918	PFC 915 + FAU D PFC 918 + FAU D	75 x 75 75 x 75	100 x 100 100 x 100
Medium 26-37″	**Modular**	**Modular**	**Fitment min.**	**Fitment max.**
	PFA 9010 ceiling plate* + PFA 9015 extension tube* + PFA 9001 turn & tilt unit + FAU 3125 flat display interface	PFA 9010 ceiling plate* + PFA 9015 extension tube* + PFA 9002 turn & tilt unit + 2x FAU 3125 flat display interface	75 x 75	200 x 200
Large 32-50″ Extra large 40-65″	**Modular**	**Modular**	**Fitment min.**	**Fitment max.**
	PFA 9010 ceiling plate* + PFA 9015 extension tube* + PFA 9001 turn & tilt unit + FAU 3150 flat display interface	PFA 9010 ceiling plate* + PFA 9015 extension tube* + PFA 9002 turn & tilt unit + 2x FAU 3150 flat display interface	100 x 100	960 x 512

* Other modules possible

PRODUCT CONFIGURATOR

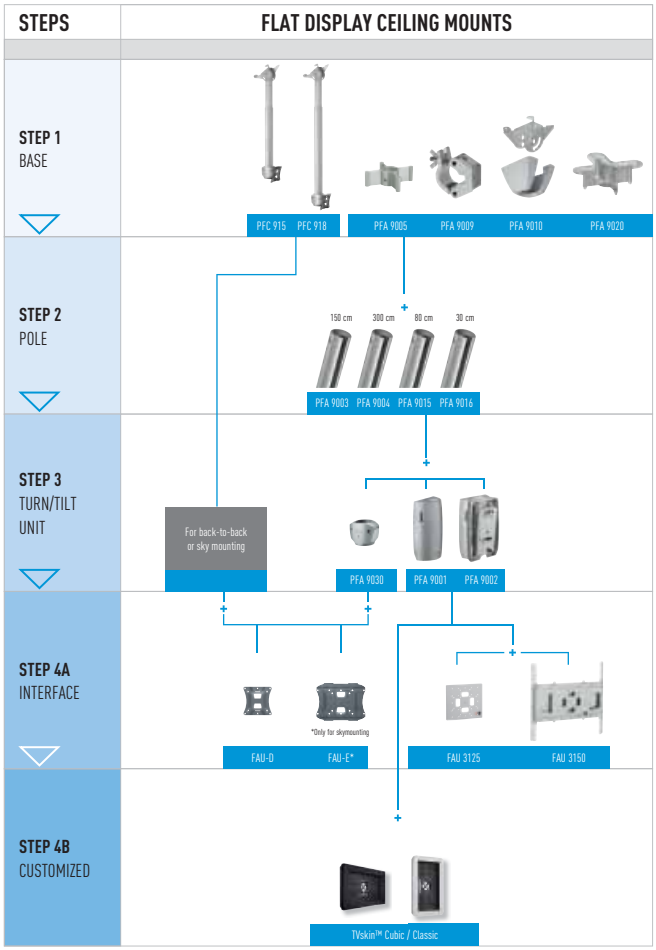

PFC 915
Flat display ceiling mount

SIZE 30-58 cm / 12-23"

MAX. 12 kg / 26 lbs (balanced)

- Ceiling plate
- Height adjustable, 46-74 cm
- Turn & tilt
- Universal VESA MIS-D interface (100x100 mm)
- CIS® Cable Inlay System
- Special anti-theft screws
- Second flat display mounting with optional FAU-D LCD-interface (see page 22)
- For sky mounting* use optional FAU-E interface

* Not every flat display is suitable for sky mounting

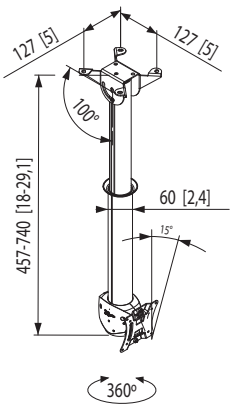

mm (inch)

PFC 918
Flat display ceiling mount

30-58 cm / 12-23"

12 kg / 26 lbs (balanced)

- Ceiling plate
- Height adjustable, 77-135 cm
- Turn & tilt
- Universal VESA MIS-D interface (100x100 mm)
- CIS® Cable Inlay System
- Special anti-theft screws
- Second flat display mounting with optional FAU-D LCD-interface (see page 22)
- For sky mounting* use optional FAU-E interface

* Not every flat display is suitable for sky mounting

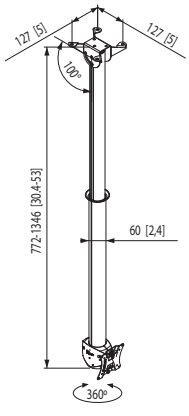

mm (inch)

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV	Interface	VESA	Distance to ceiling
PFC 915	30-58 cm / 12-23"	12 kg / 26,4 lbs	●	✔	✔	✔	✔P	Incl.	MIS-D	457-740 mm
PFC 918	30-58 cm / 12-23"	12 kg / 26,4 lbs	●	✔	✔	✔	✔P	Incl.	MIS-D	772-1346 mm

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PFA 9010
Ceiling plate

MAX. (2x) 60 kg / (2x) 132 lbs (balanced)

- Ceiling plate for PFA extension tubes
- Suitable for flat and sloping ceilings
- Also suitable for vertical use on walls
- Cover included

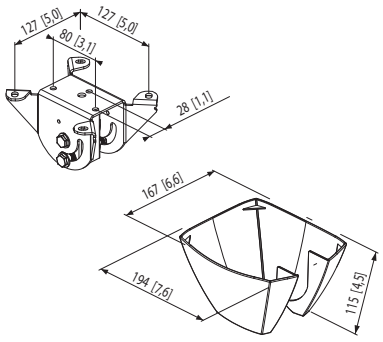

mm [inch]

PFA 9005
Ceiling plate

(2x) 60 kg / (2x) 132 lbs (balanced)

- Ceiling plate for PFA extension tubes



mm [inch]

PFA 9020
Extra strong ceiling plate

(2x) 60 kg / (2x) 132 lbs (balanced)

- Especially for long extension tubes, i.e. PFA 9004

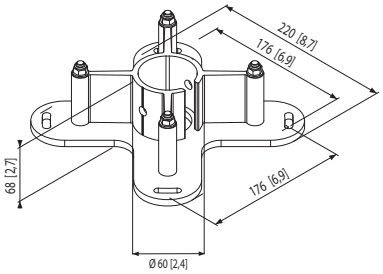

mm [inch]

Type nr.	Max.	Colour	TüV
PFA 9010	(2x) 60 kg / (2x) 132 lbs	● ●	✔P
PFA 9005	(2x) 60 kg / (2x) 132 lbs	● ●	✔P
PFA 9020	(2x) 60 kg / (2x) 132 lbs	●	✔P

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PFA 9009
Truss adapter

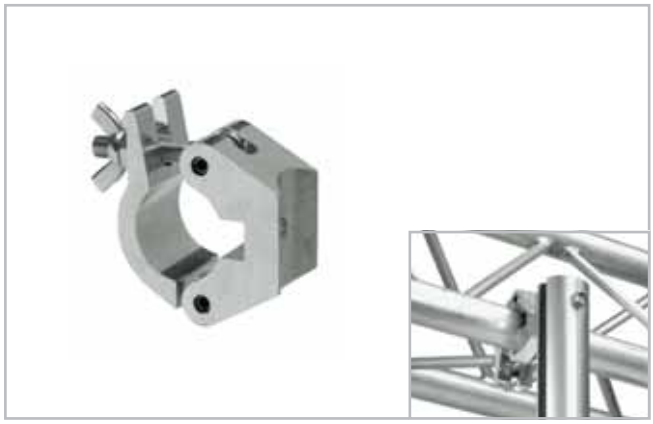

MAX. 60 kg / 132 lbs

●

- Adapter for attaching extension tubes to 51 mm truss systems

PFA 9003/9004/9015/9016
Extension tubes

(2x) 60 kg / (2x) 132 lbs (balanced)

● ● PFA 9016 ●

- CIS® Cable Inlay System, no need to cut plugs
- Aluminium, easy to cut to length

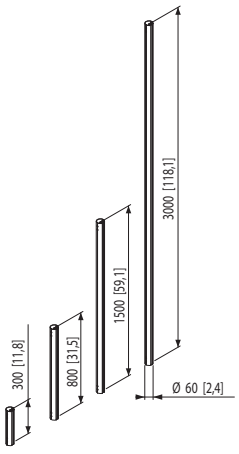

mm [inch]

Type nr.	Max.	Colour	TüV
PFA 9009	60 kg / 132 lbs	●	✔P
PFA 9003/9004/9015/9016	(2x) 60 kg / (2x) 132 lbs	● ● PFA 9016 ●	✔P

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PFA 9001
Turn & tilt unit

SIZE –

MAX. 60 kg / 132 lbs

- Autolock® locking system
- Fits on PFA extension tubes and standard 60 mm tubes
- Turn and 20° tilt function
- Suitable for interfaces FAU 3125 or FAU 3150 (see page 22/23)

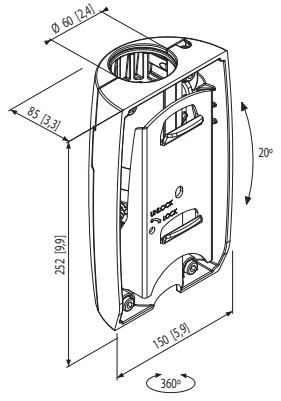

mm [inch]

PFA 9002
Turn & tilt unit for 2 flat displays back-to-back

–

(2x) 60 kg / (2x) 132 lbs (balanced)

- Autolock® locking system
- Fits on PFA extension tubes and standard 60 mm tubes
- Turn and 20° tilt function
- Suitable for 2x interfaces FAU 3125 or FAU 3150 (see page 22/23)

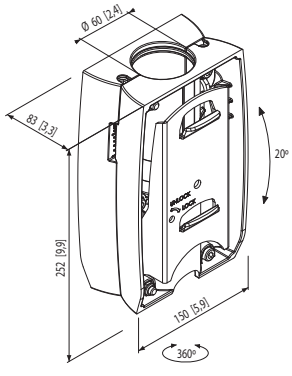

mm [inch]

PFA 9030
Turn & tilt unit

≤ 26"

20 kg / 44 lbs

- Fits on PFA extension tubes (see page 20) or standard Ø 60 mm tube
- Turn and 15° tilt function
- Suitable for:
  - 1 x FAU-D interface for single flat display
  - 2 x FAU-D interface for 2 flat displays back-to-back
  - 1 x FAU-E interface for sky mounting*

* Not every flat display may be suitable for sky mounting. Check the manual.

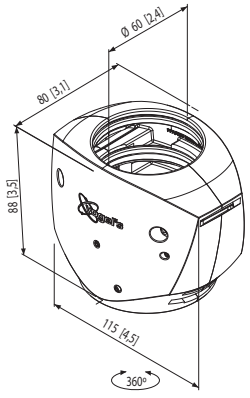

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV
PFA 9001	–	60 kg / 132 lbs	● ●	✔	✔	✔	✔P
PFA 9002	–	(2x) 60 kg / (2x) 132 lbs	● ●	✔	✔	✔	✔P
PFA 9030	≤ 26"	20 kg / 44 lbs	●	✔	✔	✔	✔P

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

FAU-D
Universal flat display interface, VESA MIS-D

SIZE 30-58 cm / 12-23"

MAX. 12 kg / 26 lbs

●

- Use in combination with PFA 9030 (see page 21) or PFC 915/918 (see page 18)
- 100x100 mm mounting



mm [inch]

FAU-E
Universal flat display interface, VESA MIS-D-E

30-66 cm / 12-26"

20 kg / 44 lbs

●

- Use in combination with PFA 9030 (see page 21) or PFC 915/918 for sky mounting* (see page 18)
- 100x100 mm mounting
- 200x100 mm mounting

* Not every flat display may be suitable for sky mounting. Check the manual.

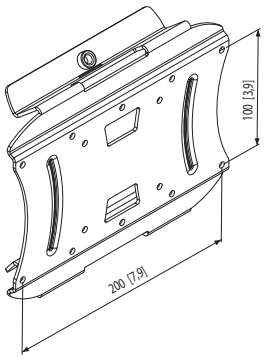

mm [inch]

FAU 3125
Universal flat display interface, VESA MIS-D-E

58-101 cm / 23-40"

60 kg / 132 lbs

● ●

- VESA MIS-D-E (including 75x75, 100x100, 200x100, 200x200 mm mounting)
- Autolock® locking system
- Landscape or portrait mounting
- Optional anti-theft lock PFA 9008 (see page 24)

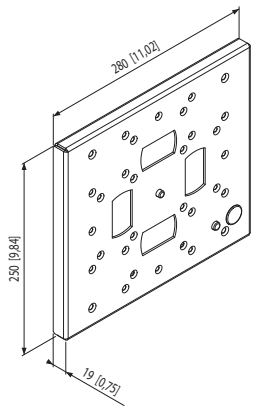

mm [inch]

Type nr.	SIZE	MAX.	Colour	TüV	VESA
FAU-D	30-58 cm / 12-23"	12 kg / 26 lbs	●	✔	MIS-D
FAU-E	30-66 cm / 12-26"	20 kg / 44 lbs	●	✔	MIS-E
FAU 3125	58-101 cm / 23-40"	60 kg / 132 lbs	● ●	✔P	MIS-D-E

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

FAU 3150
Universal flat display interface, VESA MIS-F

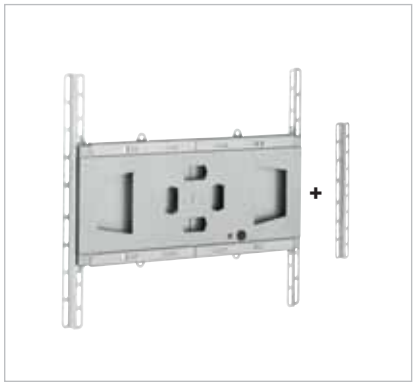

SIZE	76-165 cm / 30-65"
MAX.	70 kg / 154 lbs
	● ●

- VESA MIS-F (max. 960x512 mm)
- VESA MIS-D-E possible
- Autolock® locking system
- Landscape or portrait mounting
- Optional anti-theft lock PFA 9008 (see page 24)

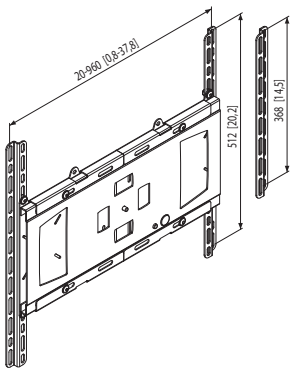

mm [inch]

PFA 9007
Joist adapter

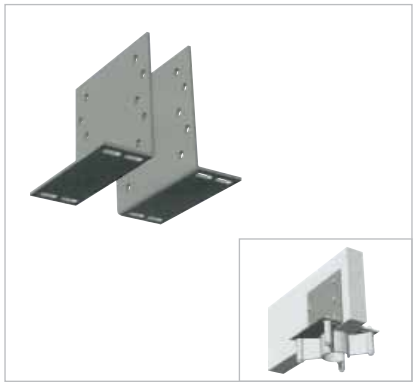

	–
	(2x) 60 kg / (2x) 132 lbs (balanced)
	●

- For attaching the PFA 9010 and PFA 9005 ceiling plate to wooden ceiling joists (see page 19)

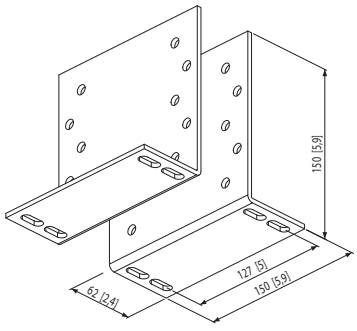

mm [inch]

PFA 9028
Floor plate

	–
	–
	●

- Floor plate for floor-to-ceiling mounting of PFA extension tubes

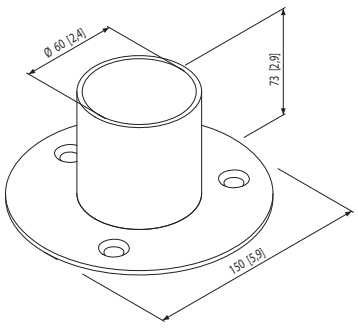

mm [inch]

Type nr.		Max.	Colour	TüV	VESA
FAU 3150	76-165 cm / 30-65"	70 kg / 154 lbs	● ●	✔P	MIS-F
PFA 9007	–	(2x) 60 kg / (2x) 132 lbs	●	✔P	–
PFA 9028	–	–	●	✔P	–

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PFA 9044/9045
Girder, H-beam mount

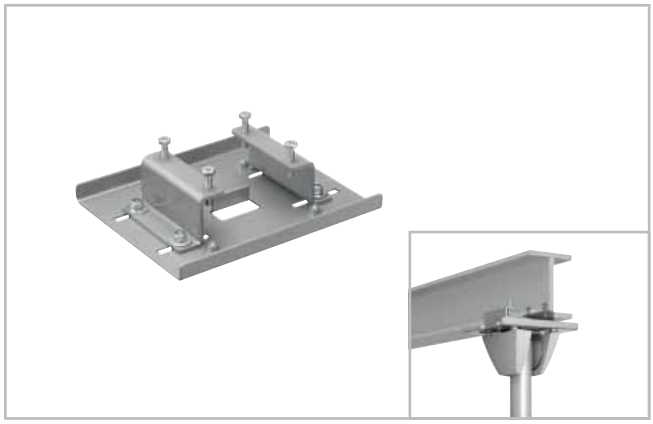

(2x) 60 kg / (2x) 132 lbs (balanced)

- To be used in combination with PFA 9010 and PFA extension tubes

PFA 9044
Minimum girder width 70 mm
Maximum girder width 190 mm

PFA 9045
Minimum girder width 140 mm
Maximum girder width 310 mm

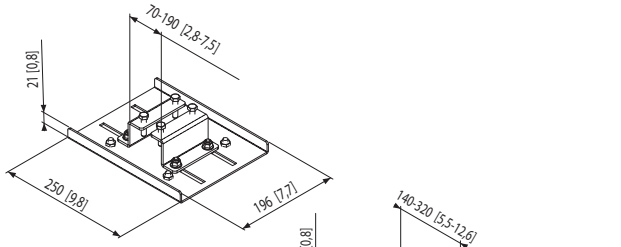

PFA 9044

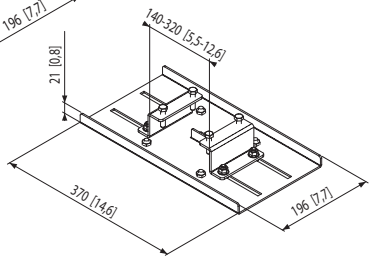

PFA 9045

mm [inch]

PFA 9021
Universal 42" flat display rear cover

SIZE
101-109 cm
40-43"

- Set of 2 steel plates to cover the back of a flat display
- For ceiling mount with turn & tilt unit PFA 9001 / 9002 (see page 21)
- Only suitable in combination with universal interface FAU 3150 (see page 23)
- Openings for autolock® system, security lock and cables

PFA 9006
Stabilisation set

- To stabilize for PFA 9004 (3 m) extension tubes

PFA 9008
Lock set

- Lock for interface FAU 3125 / FAU 3150 and PFF 1000
- Not possible to combine with PFW 910

Type nr.		Max.	Colour	TüV
PFA 9044/9045	–	(2x) 60 kg / (2x) 132 lbs	●	✔P
PFA 9021	101-109 cm / 40-43"	–	●	–

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

FLAT DISPLAY WALL MOUNTS

	Series	Fixed	Tilt	Tilt & Turn	Fitment min.	max.
Small ≤ 26″	VFW Series	VFW 030	VFW 130		75 x 75	100 x 100
				VFW 226	75 x 75	200 x 100
				VFW 326	75 x 75	200 x 100
				VFW 426	75 x 75	200 x 100
	EFW Series			EFW 1130	75 x 75	100 x 100
	6000 Series			EFW 6145	75 x 75	200 x 100
Medium 26-37″	VFW Series	VFW 032	VFW 132		75 x 75	200 x 200
	PFW Series			PFW 3220	75 x 75	200 x 200
				PFW 3230	75 x 75	200 x 200
				PFW 3240	75 x 75	200 x 200
	5000 Series	PFW 5200			75 x 75	405 x 355
		PFW 5205			75 x 75	405 x 300
			PFW 5210		75 x 75	418 x 355
		PFW 5300			75 x 75	605 x 472
		PFW 5305			75 x 75	619 x 472
			PFW 5310		75 x 75	618 x 472
	6000 Series			EFW 6245	75 x 75	200 x 200
	Modular Series	PFW 910 + FAU 3125	PFW 920 + FAU 3125	PFW 930 + FAU 3125	75 x 75	200 x 200
				PFW 950 + FAU 3125	75 x 75	200 x 200
				PFW 952 + FAU 3125	75 x 75	200 x 200
Large 32-50″	5000 Series	PFW 5000			100 x 100	818 x 472
		PFW 5005			100 x 100	828 x 472
		PFW 5015 Portrait			100 x 100	404 x 800
			PFW 5010		100 x 100	827 x 472
	6000 Series			EFW 6345	100 x 100	700 x 450
	Modular Series	PFW 910 + FAU 3150	PFW 920 + FAU 3150	PFW 930 + FAU 3150	100 x 100	960 x 512
				PFW 950 + FAU 3150	100 x 100	960 x 512
				PFW 952 + FAU 3150	100 x 100	960 x 512
Extra large 40-65″	5000 Series	PFW 5500			100 x 100	942 x 578
		PFW 5505			100 x 100	956 x 578
		PFW 5515 Portrait			100 x 100	619 x 1075
			FW 5510		100 x 100	945 x 578
	6000 Series			EFW 6445	100 x 100	950 x 550
	Modular Series	PFW 910 + FAU 3150	PFW 920 + FAU 3150	PFW 930 + FAU 3150	100 x 100	960 x 512
				PFW 950 + FAU 3150	100 x 100	960 x 512
				PFW 952 + FAU 3150	100 x 100	960 x 512
	Remote controlled			EFWE 6455 RC	280 x 100	911 x 550
XXL > 65″	5000 Series	PFW 5500			100 x 100	942 x 578
		PFW 5505			100 x 100	956 x 578
		PFW 5515 Portrait			100 x 100	619 x 1075
			PFW 5510		100 x 100	945 x 578

- Modular Series P. 26
- PFW 5000 Series P. 30
- PFW 3200 Series P. 36
- VFW Series P. 38
- 6000 Series P. 42
- Remote-Controlled P. 45

MODULAR SERIES

BUILDING BLOCKS FOR THE PRO AV INSTALLER

- The modular system is the flexible flat display mounting solution for nearly every situation or location.
- Two universal flat display interfaces in small/medium and large sizes are the backbone of the modular system and fit on all ceiling, wall or floor mounts.
- A range of ceiling plates, extensions tubes, wall mounts and smart accessories are all universal building blocks for the Pro AV installer
- Vogel's TVskin® (page 57) is also part of the modular system.
- The Product Configurator on page 8-9 or on **www.vogels.com/professional** makes it easy for you to build the solution you need.

PRODUCT CONFIGURATOR

STEPS	FLAT DISPLAY WALL MOUNTS
STEP 1 BASE	 PFW 910 PFW 920 PFW 930 PFW 950/952
STEP 2 POLE	
STEP 3 TURN/TILT UNIT	
STEP 4A INTERFACE	 FAU 3125 FAU 3150
STEP 4B CUSTOMIZED	TVskin™ Cubic / Classic

PFW 910 (+ FAU 3125 / 3150)
Flat display wall mount

SIZE 58-101 cm / 23-40" (FAU 3125)
76-165 cm / 30-65" (FAU 3150)

MAX. 60 kg / 132 lbs

● ●

- Fixed wall mount
- Autolock® locking system
- Not possible to combine with PFA 9008 Lock set
- NOT INCLUDING interface FAU 3125 / FAU 3150 (see page 22/23)

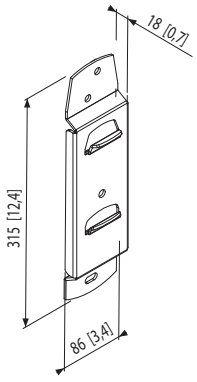

mm [inch]

PFW 920 (+ FAU 3125 / 3150)
Flat display wall mount

58-101 cm / 23-40" (FAU 3125)
76-165 cm / 30-65" (FAU 3150)

60 kg / 132 lbs

● ●

- With tilt functionality
- Autolock® locking system
- Optional PFA 9017 wide wall mounting strips (see page 29)
- NOT INCLUDING interface FAU 3125 / FAU 3150 (see page 22/23)

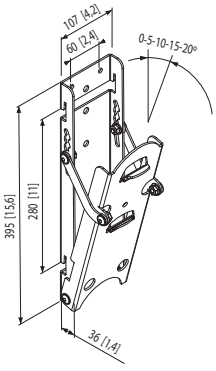

mm [inch]

PFW 930 (+ FAU 3125 / 3150)
Flat display wall mount

58-101 cm / 23-40" (FAU 3125)
76-165 cm / 30-65" (FAU 3150)

60 kg / 132 lbs

● ●

- With turn & tilt functionality
- Autolock® locking system
- Tilt mechanism with auto balance
- NOT INCLUDING interface FAU 3125 / FAU 3150 (see page 22/23)

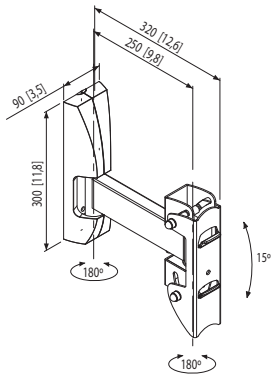

mm [inch]

Type nr.	FAU 3125	FAU 3150	Max.	Colour	Adjustability Tilt	Adjustability Turn	Lock	TüV	VESA	Distance to wall
PFW 910	58-101 cm / 23-40"	76-165 cm / 30-65"	60 kg / 132 lbs	● ●	–	–	Autolock®	✔P	MIS-F (FAU 3150)	18 mm
PFW 920	58-101 cm / 23-40"	76-165 cm / 30-65"	60 kg / 132 lbs	● ●	✔	–	Autolock®	✔P	MIS-F (FAU 3150)	36 mm
PFW 930	58-101 cm / 23-40"	76-165 cm / 30-65"	60 kg / 132 lbs	● ●	✔	✔	Autolock®	✔P	MIS-F (FAU 3150)	82-320 mm

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PFW 950 (+ FAU 3125 / FAU 3150)
Right-angled flat display wall mount

SIZE 58-101 cm / 23-40" (FAU 3125) – 76-107 cm / 30-42" (FAU 3150)

MAX. 60 kg / 132 lbs

- Specially designed for passageways, halls, lecture theatres etc.
- Autolock® locking system
- With stylish wall plate cover
- NOT INCLUDING interface FAU 3125 or FAU 3150 (see page 22/23)

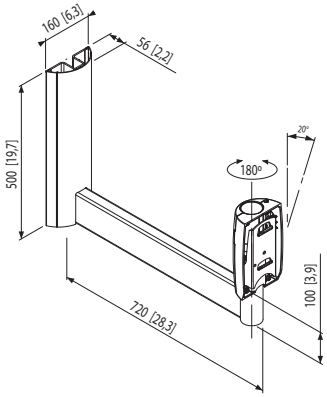

mm [inch]

PFW 952 (+ 2x FAU 3125 / 2x FAU 3150)
Right-angled flat display wall mount for 2 flat displays back-to-back

58-101 cm / 23-40" (FAU 3125) – 76-107 cm / 30-42" (FAU 3150)

(2x) 60 kg / (2x) 132 lbs

- Specially designed for passageways, halls, lecture theatres etc.
- Autolock® locking system
- With stylish wall plate cover
- NOT INCLUDING (2x) interface FAU 3125 or FAU 3150 (see page 22/23)

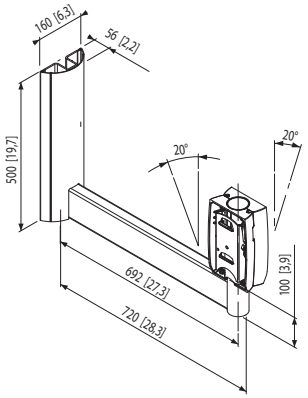

mm [inch]

Type nr.	FAU 3125	FAU 3150	Max.	Colour	Adjustability Tilt	Adjustability Turn	Lock	TüV	VESA	Distance to wall
PFW 950	58-101 cm / 23-40"	76-107 cm / 30-42"	60 kg / 132 lbs	●	✔	✔	Autolock®	✔P	MIS-F (FAU 3150)	720 mm
PFW 952	58-101 cm / 23-40"	76-107 cm / 30-42"	60 kg / 132 lbs	●	✔	–	Autolock®	✔P	MIS-F (FAU 3150)	720 mm

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PFA 9031
Column clamp

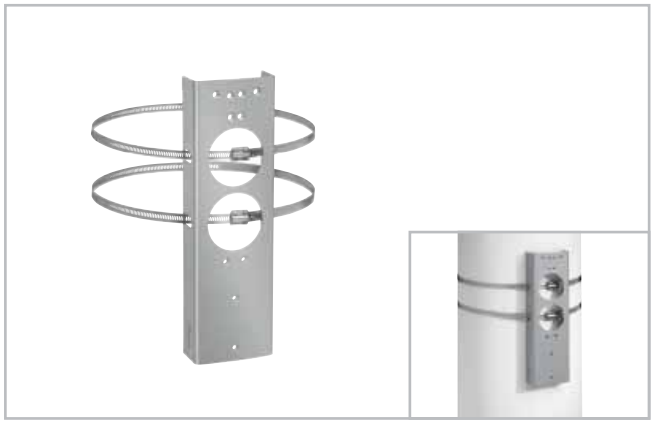

SIZE –

MAX. 60 kg / 132 lbs

●

- Mounting flat displays to columns without drilling in a column
- Column diameter 200-750 mm
- Use in combination with PFW 910 / 920 / 930

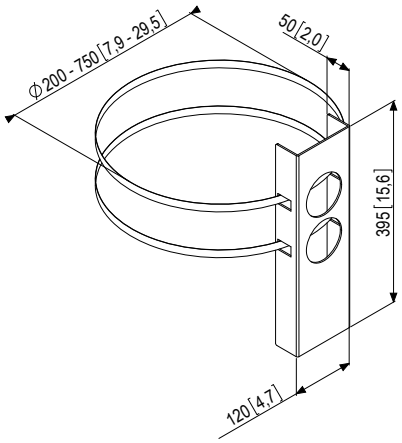

mm [inch]

PFA 9017
Double stud adapter

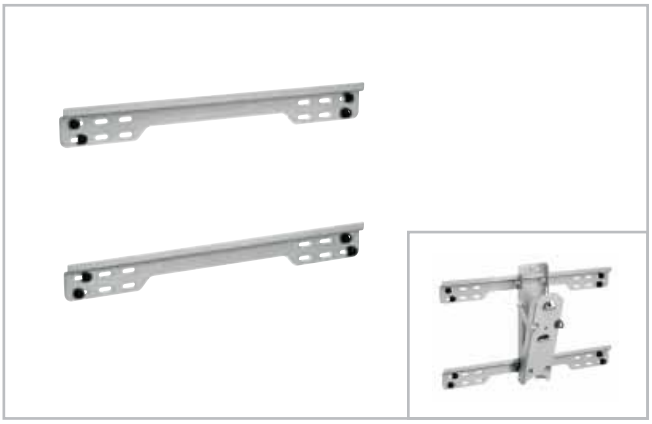

–

70 kg / 154 lbs

●

- Suitable for PFW 920 (see page 27)

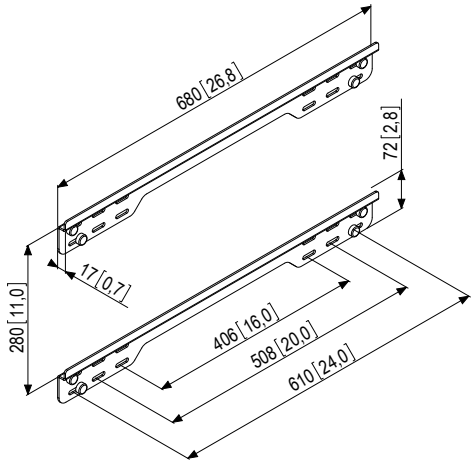

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Adjustability Turn	TüV	Interface	VESA	Distance to wall
PFA 9031	–	60 kg / 132 lbs	●	–	–	✔	–	–	–
PFA 9017	–	70 kg / 154 lbs	●	–	–	–	–	–	–

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PFW 5000 SERIES

SUPER FLAT AND SECURE

- The range of wall mounts especially for the Pro AV installer
- 5000 Series is a full range of flat and tilting wall mounts
- Quick installation due to smart features such as the levelling wall plate and centre marks for exact setting of the mounting height.
- Locking features that really work and are accessible
- Portrait position mounts for digital signage use

KEY USP'S PFW 5000 SERIES

1. **Easy levelling and installation**
2. **Security locks that really work**
3. **Super flat**
4. **Landscape and portrait position mounts**

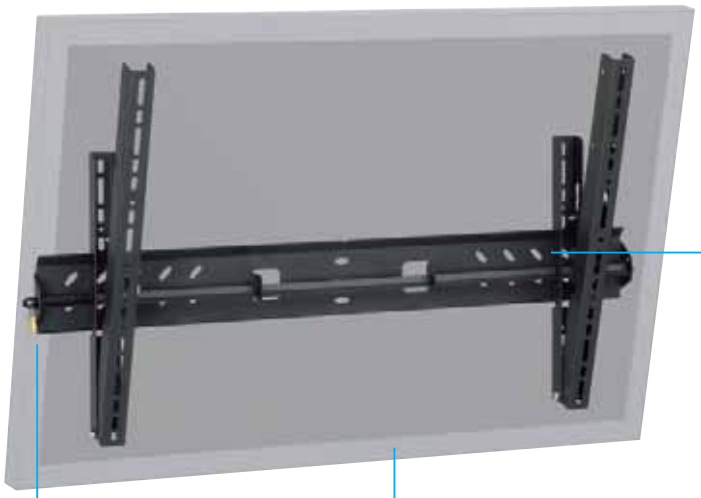

PFW 5510

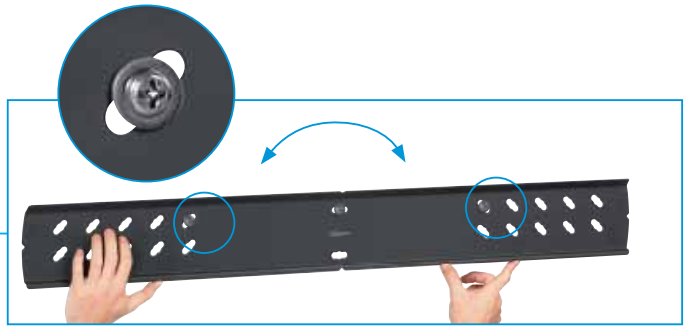

Easy levelling and installation
Special diagonal mounting holes make it very easy to level the wall plate during installation. You can even fine tune it after installation.

Security locks that really work
Several security features are available that are designed to safeguard flat displays and prevent removal by unauthorised persons.

Super flat
These mounts are super flat, some are only 34 mm deep, and still have security lock features that work effectively in the small space between the flat display and the wall.

Landscape and portraits mounts
Especially for digital signage use, there are portrait position mounts.

PFW 5200
Flat display wall mount

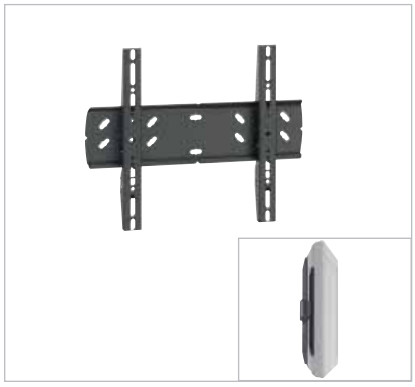

SIZE 57-81 cm / 23-32"

MAX. 75 kg / 165 lbs

●

- Super flat only 34 mm from the wall
- Built-in wall plate level function
- Autolock® locking system
- Unlock clip included (2x)
- Universal, complies with VESA MIS-F (max. 405x355 mm)

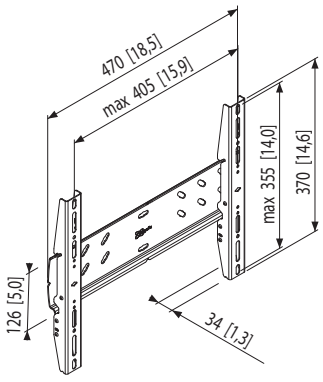

mm [inch]

PFW 5205
Flat display wall mount

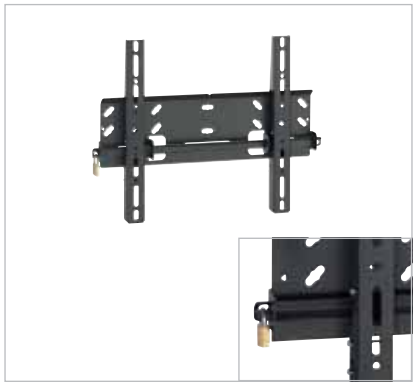

57-81 cm / 23-32"

75 kg / 165 lbs

●

- Super flat only 34 mm from the wall
- Locking bar + padlock included
- Built-in wall plate level function
- Autolock® locking system
- Universal, complies with VESA MIS-F (max. 405x300 mm)

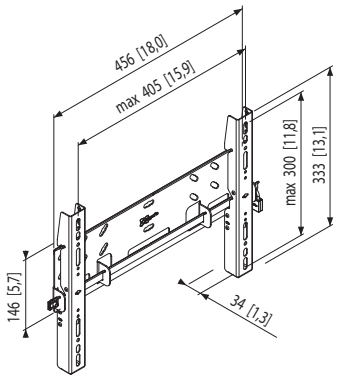

mm [inch]

PFW 5210
Flat display wall mount

57-81 cm / 23-32"

75 kg / 165 lbs

●

- Locking bar + padlock included
- Built-in wall plate level function
- Incremental tilt function 0-5-10-15°
- Mounting holes for optional set-top box
- Connecting wall plates for in-line mounting of multiple flat displays
- Universal, complies with VESA MIS-F (max. 418x355 mm)

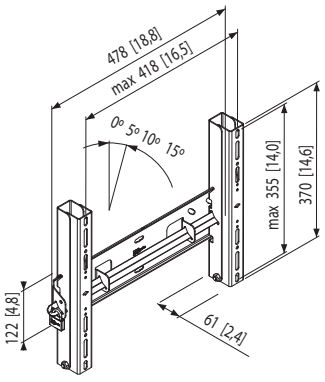

mm [inch]

Type nr.		Max.	Colour	Adjustability Fixed super flat	Adjustability Tilt	Lock	TüV	Interface	VESA	Distance to wall
PFW 5200	57-81 cm / 23-32"	75 kg / 165 lbs	●	✔	–	Autolock®	✔P	Incl.	MIS-F	34 mm
PFW 5205	57-81 cm / 23-32"	75 kg / 165 lbs	●	✔	–	Autolock® + Padlock	✔P	Incl.	MIS-F	34 mm
PFW 5210	57-81 cm / 23-32"	75 kg / 165 lbs	●	–	✔	Padlock	✔P	Incl.	MIS-F	61 mm

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PFW 5300
Flat display wall mount

SIZE 66-107 cm / 26-42"

MAX. 75 kg / 165 lbs

●

- Super flat only 34 mm from the wall
- Built-in wall plate level function
- Autolock® locking system
- Unlock clip included (2x)
- Universal, complies with VESA MIS-F (max. 605x472 mm)

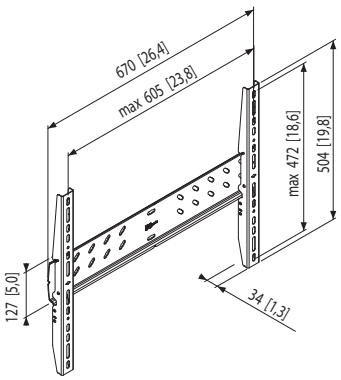

mm [inch]

PFW 5305
Flat display wall mount

66-107 cm / 26-42"

75 kg / 165 lbs

●

- Super flat only 34 mm from the wall
- Locking bar + padlock included
- Built-in wall plate level function
- Autolock® locking system
- Universal, complies with VESA MIS-F (max. 619x472 mm)

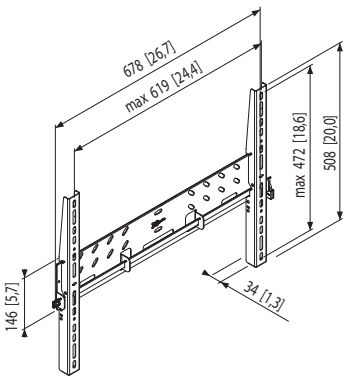

mm [inch]

PFW 5310
Flat display wall mount

66-107 cm / 26-42"

75 kg / 165 lbs

●

- Locking bar + padlock included
- Built-in wall plate level function
- Incremental tilt function 0-5-10-15°
- Mounting holes for optional set-top box
- Connecting wall plates for in-line mounting of multiple flat displays
- Universal, complies with VESA MIS-F (max. 618x472 mm)

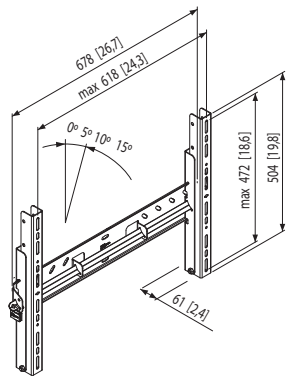

mm [inch]

Type nr.		Max.	Colour	Adjustability Fixed super flat	Adjustability Tilt	Lock	TüV	Interface	VESA	Distance to wall
PFW 5300	66-107 cm / 26-42"	75 kg / 165 lbs	●	✔	–	Autolock®	✔P	Incl.	MIS-F	34 mm
PFW 5305	66-107 cm / 26-42"	75 kg / 165 lbs	●	✔	–	Autolock® + Padlock	✔P	Incl.	MIS-F	34 mm
PFW 5310	66-107 cm / 26-42"	75 kg / 165 lbs	●	–	✔	Padlock	✔P	Incl.	MIS-F	61 mm

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PFW 5000
Flat display wall mount

SIZE 94-127 cm / 37-50"

MAX. 75 kg / 165 lbs

●

- Super flat only 34 mm from the wall
- Built-in wall plate level function
- Autolock® locking system
- Unlock clip included (2x)
- Universal, complies with VESA MIS-F (max. 818x472 mm)

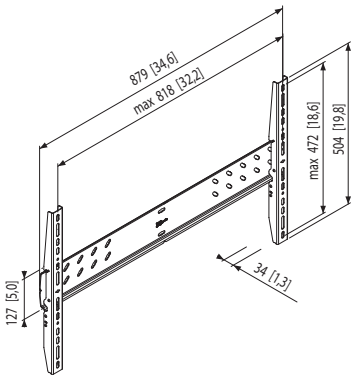

mm [inch]

PFW 5005
Flat display wall mount

94-127 cm / 37-50"

75 kg / 165 lbs

●

- Super flat only 34 mm from the wall
- Locking bar + padlock included
- Built-in wall plate level function
- Autolock® locking system
- Universal, complies with VESA MIS-F (max. 828x472 mm)

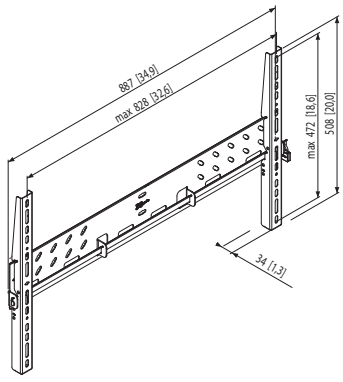

mm [inch]

PFW 5010
Flat display wall mount

94-127 cm / 37-50"

75 kg / 165 lbs

●

- Locking bar + padlock included
- Built-in wall plate level function
- Incremental tilt function 0-5-10-15°
- Mounting holes for optional set-top box
- Connecting wall plates for in-line mounting of multiple flat displays
- Universal, complies with VESA MIS-F (max. 827x472 mm)

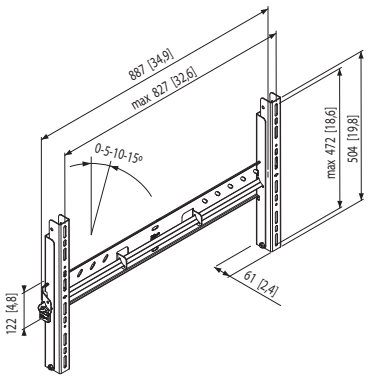

mm [inch]

Type nr.		Max.	Colour	Adjustability Fixed super flat	Adjustability Tilt	Lock	TüV	Interface	VESA	Distance to wall
PFW 5000	94-127 cm / 37-50"	75 kg / 165 lbs	●	✔	–	Autolock®	✔P	Incl.	MIS-F	34 mm
PFW 5005	94-127 cm / 37-50"	75 kg / 165 lbs	●	✔	–	Autolock® + Padlock	✔P	Incl.	MIS-F	34 mm
PFW 5010	94-127 cm / 37-50"	75 kg / 165 lbs	●	–	✔	Padlock	✔P	Incl.	MIS-F	61 mm

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PFW 5500
Flat display wall mount

SIZE 127-178 cm / 50-70"

MAX. 75 kg / 165 lbs

●

- Super flat only 34 mm from the wall
- Built in wall plate level function
- Autolock® locking system
- Unlock clip included (2x)
- Universal, complies with VESA MIS-F (max. 942x578 mm)

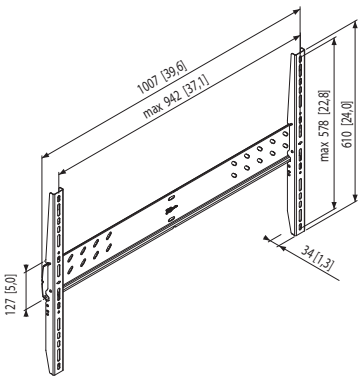

mm [inch]

PFW 5505
Flat display wall mount

127-178 cm / 50-70"

75 kg / 165 lbs

●

- Super flat only 34 mm from the wall
- Locking bar + padlock included
- Built in wall plate level function
- Autolock® locking system
- Universal, complies with VESA MIS-F (max. 956x578 mm)

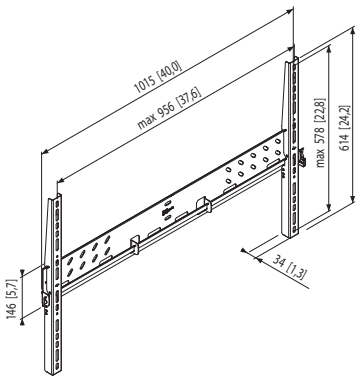

mm [inch]

PFW 5510
Flat display wall mount

127-178 cm / 50-70"

75 kg / 165 lbs

●

- Locking bar + padlock included
- Built in wall plate level function
- Incremental tilt function 0-5-10-15°
- Mounting holes for optional set-top box
- Connecting wall plates for in-line mounting of multiple flat displays
- Universal, complies with VESA MIS-F (max. 945x578 mm)

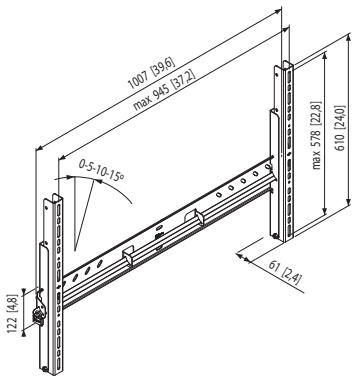

mm [inch]

Type nr.		Max.	Colour	Adjustability Fixed super flat	Adjustability Tilt	Lock	TüV	Interface	VESA	Distance to wall
PFW 5500	127-178 cm / 50-70"	75 kg / 165 lbs	●	✔	–	Autolock®	✔P	Incl.	MIS-F	34 mm
PFW 5505	127-178 cm / 50-70"	75 kg / 165 lbs	●	✔	–	Autolock® + Padlock	✔P	Incl.	MIS-F	34 mm
PFW 5510	127-178 cm / 50-70"	75 kg / 165 lbs	●	–	✔	Padlock	✔P	Incl.	MIS-F	61 mm

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PFW 5015
Flat display wall mount, portrait position

SIZE 94-127 cm / 37-50"

MAX. 75 kg / 165 lbs

●

- Especially for portrait position
- Super flat only 34 mm from the wall
- Locking bar + padlock included
- Built-in wall plate level function
- Autolock® locking system
- Universal, complies with VESA MIS-F (max. 404x800 mm)

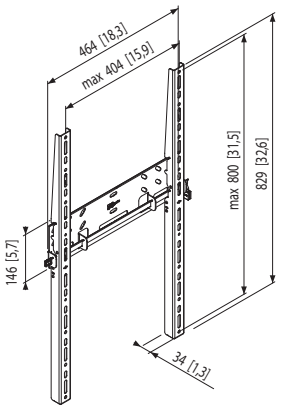

mm [inch]

PFW 5515
Flat display wall mount, portrait position

127-165 cm / 50-65"

75 kg / 165 lbs

●

- Especially for portrait position
- Super flat only 34 mm from the wall
- Locking bar + padlock included
- Built-in wall plate level function
- Autolock® locking system
- Universal, complies with VESA MIS-F (max. 619x1075 mm)

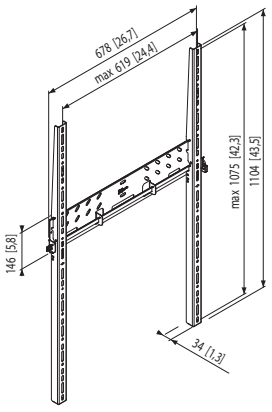

mm [inch]

Type nr.		Max.	Colour	Adjustability Fixed super flat	Adjustability Tilt	TüV	Interface	VESA	Distance to wall
PFW 5015	94-127 cm / 37-50"	75 kg / 165 lbs	●	✔	–	✔P	Incl.	MIS-F	34 mm
PFW 5515	127-165 cm / 50-65"	75 kg / 165 lbs	●	✔	–	✔P	Incl.	MIS-F	34 mm

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

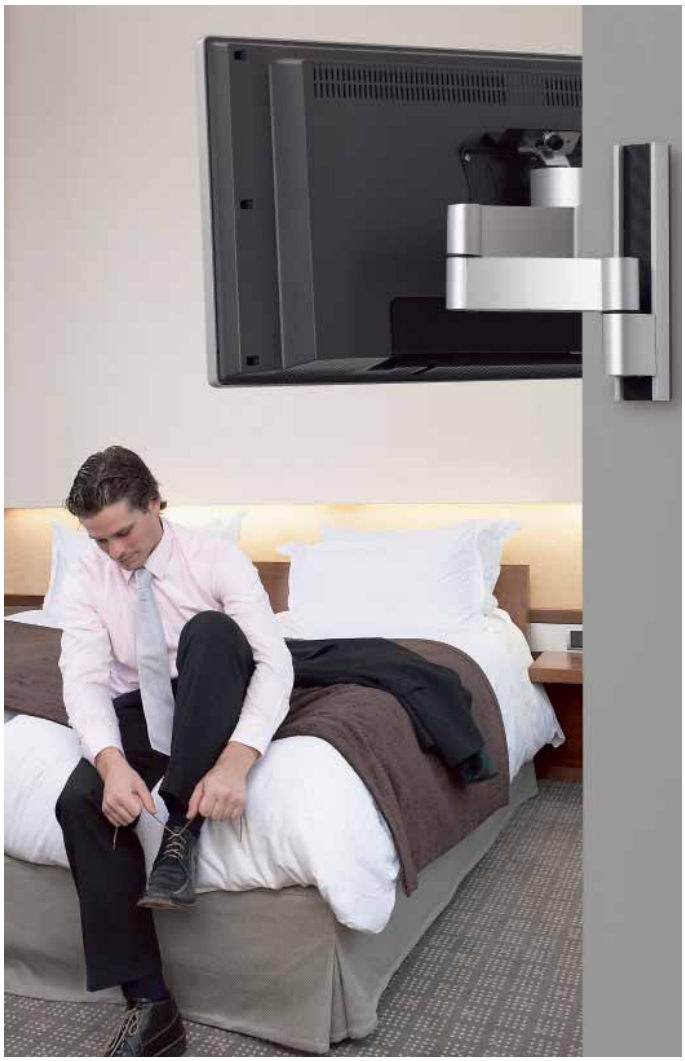

PFW 3200 SERIES

ESPECIALLY DESIGNED FOR HOTEL ROOM USE

It includes special features such as an extra solid construction, discrete security padlock and screws and TüV safety approval for professional use, making this the perfect series of wall mounts for hotel rooms.

	VFW-X26 SERIES	PFW 3200 SERIES
15"-23" / 38-57 cm	✔	✔
15"-32" / 38-81 cm	–	✔
Extra solid construction	–	✔
Padlock included	–	✔
Security screws included	–	✔
TüV Approval	✔	✔
TüV Professional use	–	✔

KEY USP'S PFW 3200 SERIES

1. Very solid construction
2. Stylish design
3. Security padlock & screws included
4. TüV Professional use

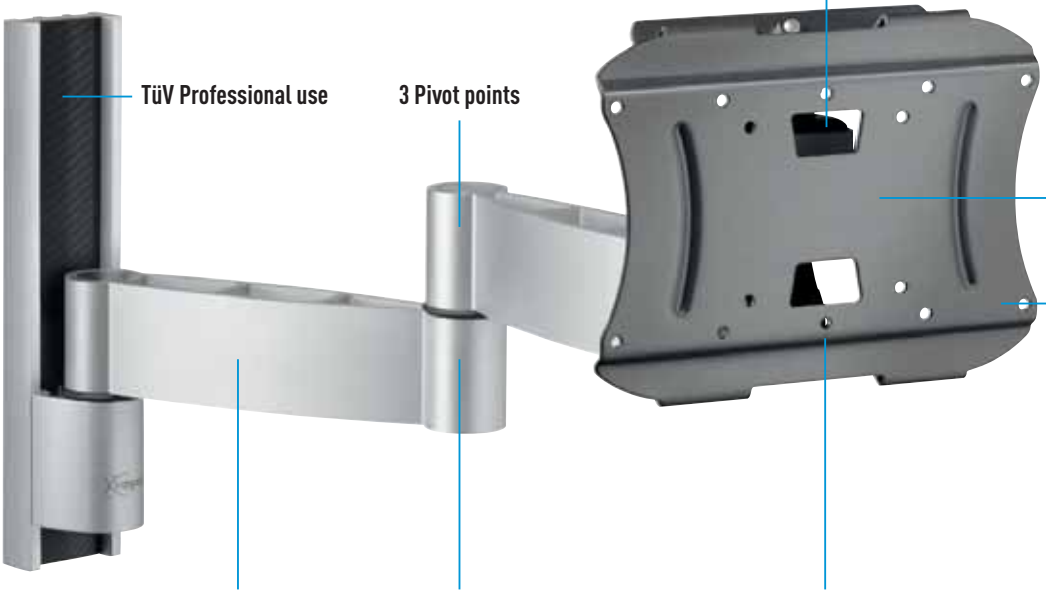

Security padlock & screws included

Tilt & turn

Strips for 200x200 mm mounting included

PFW 3240

PFW 3220
Flat display wall mount

SIZE 57-81 cm / 23-32"

MAX. 32 kg / 70 lbs

- One pivot point
- Tilt and turn functions guarantee optimal viewing position
- Discrete black padlock included
- Universal, complies with VESA MIS-D (100x100, 75x75 mm) and VESA MIS-E (200x100 mm)
- Strips for VESA MIS-E 200x200 mm included
- Pre-assembled flat display mount simplifies mounting

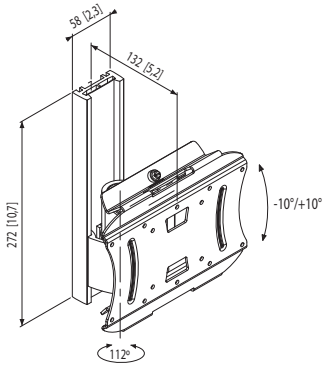

mm [inch]

PFW 3230
Flat display wall mount

57-81 cm / 23-32"

32 kg / 70 lbs

- Two pivot points
- Tilt, turn and reach functions guarantee optimal viewing position
- Discrete black padlock included
- Universal, complies with VESA MIS-D (100x100, 75x75 mm) and VESA MIS-E (200x100 mm)
- Strips for VESA MIS-E 200x200 mm included
- Cable clips for guiding your cables
- Buffer rings prevent damage to flat display and wall
- Pre-assembled flat display mount simplifies mounting

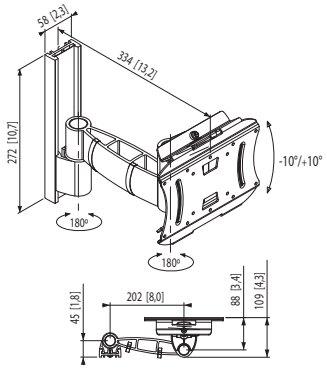

mm [inch]

PFW 3240
Flat display wall mount

57-81 cm / 23-32"

32 kg / 70 lbs

- Three pivot points
- Tilt, turn and reach functions guarantee optimal viewing position
- Discrete black padlock included
- Universal, complies with VESA MIS-D (100x100, 75x75 mm) and VESA MIS-E (200x100 mm)
- Strips for VESA MIS-E 200x200 mm included
- Cable clips for guiding your cables
- Buffer rings prevent damage to flat display and wall
- Pre-assembled flat display mount simplifies mounting

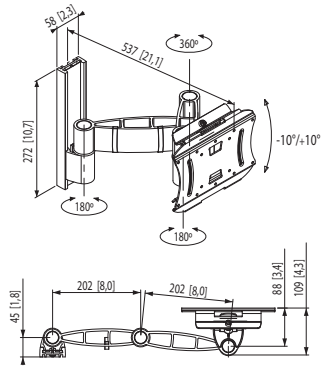

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Adjustability Turn	Lock	TüV	Interface	VESA	Distance to wall
PFW 3220	57-81 cm / 23-32"	32 kg / 70 lbs	●	✔	✔	✔	✔P	Incl.	MIS-D-E	133 mm
PFW 3230	57-81 cm / 23-32"	32 kg / 70 lbs	●	✔	✔	✔	✔P	Incl.	MIS-D-E	109-334 mm
PFW 3240	57-81 cm / 23-32"	32 kg / 70 lbs	●	✔	✔	✔	✔P	Incl.	MIS-D-E	109-537 mm

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

VFW SERIES

PROVIDE BASIC FUNCTIONALITY WITH VOGEL'S QUALITY

Seven different models, for 10"-26" flat displays, offer all the functionality you need. There are four models for superflat or tilt mounting and three models with pivot arms offering flexible movement of the flat display.

	FUNCTIONALITY	FITMENT
VFW 030	fixed, superflat	100x100 mm
VFW 130	tilt	100x100 mm
VFW 032	fixed, superflat	200x100, 200x200 mm
VFW 132	tilt	200x100, 200x200 mm
VFW 226	1 pivot turn & tilt	100x100, 200x100 mm
VFW 326	2 pivots turn & tilt	100x100, 200x100 mm
VFW 426	3 pivots turn & tilt	100x100, 200x100 mm

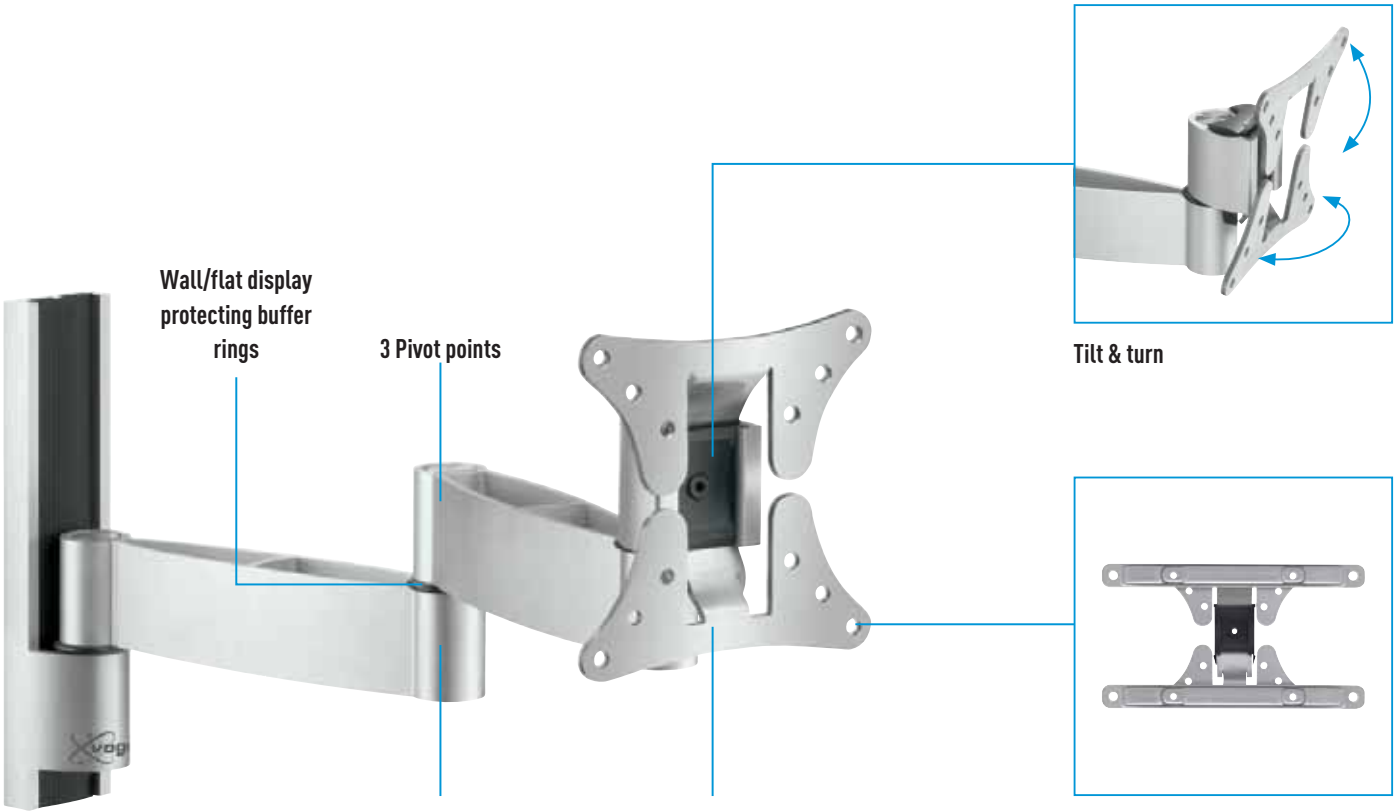
Wall/flat display protecting buffer rings
3 Pivot points
Tilt & turn
Stylish design
Universal interface 75x75, 100x100 mm
Strips for 100x200 mm mounting included

VFW 426

VFW 226
Flat display wall mount

SIZE 25-66 cm / 10-26″

MAX. 15 kg / 33 lbs

● ●

- One pivot point
- Universal, complies with VESA MIS-D (100x100, 75x75 mm)
- Strips included for 200x100 mm VESA mounting holes
- Tilt and turn functions guarantee optimal viewing position
- Pre-assembled flat display mount simplifies mounting

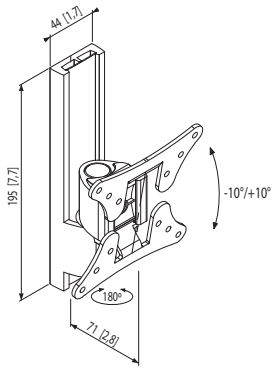

mm [inch]

VFW 326
Flat display wall mount

25-66 cm / 10-26″

15 kg / 33 lbs

● ●

- Two pivot points
- Universal, complies with VESA MIS-D (100x100, 75x75 mm)
- Strips included for 200x100 mm VESA mounting holes
- Tilt and turn functions guarantee optimal viewing position
- Pre-assembled flat display mount simplifies mounting
- Buffer rings prevent damage to flat display and wall
- Cable clips for guiding cables

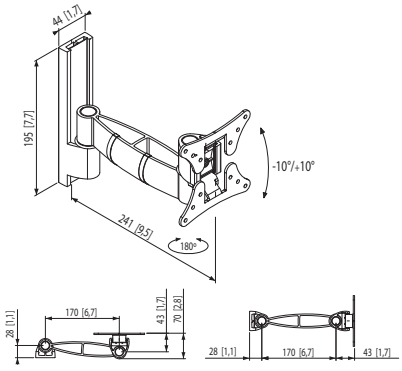

mm [inch]

VFW 426
Flat display wall mount

25-66 cm / 10-26″

15 kg / 33 lbs

● ●

- Three pivot points
- Universal, complies with VESA MIS-D (100x100, 75x75 mm)
- Strips included for 200x100 mm VESA mounting holes
- Tilt, turn and reach functions guarantee optimal viewing position
- Pre-assembled flat display mount simplifies mounting
- Buffer rings prevent damage to flat display and wall
- Cable clips for guiding cables

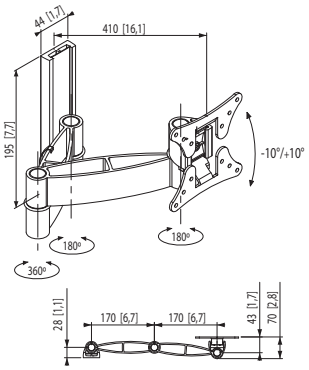

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Adjustability Turn	Lock	TüV	Interface	VESA	Distance to wall
VFW 226	25-66 cm / 10-26″	15 kg / 33 lbs	● ●	✔	✔	–	✔	Incl.	MIS-D	70 mm
VFW 326	25-66 cm / 10-26″	15 kg / 33 lbs	● ●	✔	✔	–	✔	Incl.	MIS-D	70-240 mm
VFW 426	25-66 cm / 10-26″	15 kg / 33 lbs	● ●	✔	✔	–	✔	Incl.	MIS-D	70-410 mm

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

EFW 1130
Display desk + wall mount

SIZE 25-61 cm / 10-24″

MAX. 10-15 kg / 22-33 lbs

●

- Universal, complies with VESA MIS-D (100x100, 75x75 mm)
- Tilt, turn & reach functions guarantee optimal viewing position
- For PC and TV use
- Choice of desk or wall mounting solution
- Adjustable height (from 20-43 cm / 7.87″-16.9″)
- CIS® Cable Inlay System
- Space saving, free up space on your desk

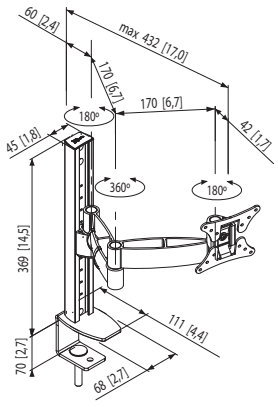

mm [inch]

VFW 030
Flat display wall mount

25-77 cm / 10-30″

30 kg / 66 lbs

●

- Universal, complies with VESA MIS-D (100x100, 75x75 mm)
- Fixed to the wall
- Minimal distance to the wall (26 mm/1″)
- Easy mounting (mounting hardware included)

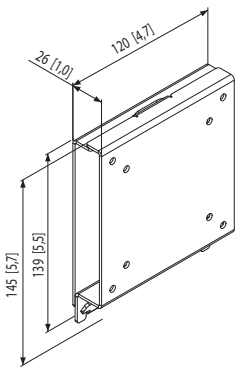

mm [inch]

VFW 130
Flat display wall mount

25-77 cm / 10-30″

30 kg / 66 lbs

●

- Universal, complies with VESA MIS-D (100x100, 75x75 mm)
- Tilt function 10°
- Minimal distance to the wall (50 mm/2″)
- Easy mounting (mounting hardware included)

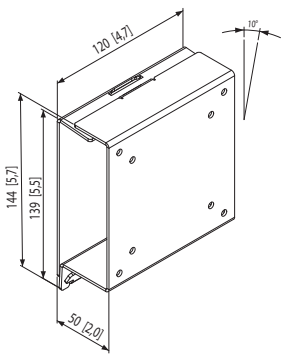

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV	Interface	VESA	Distance to wall
EFW 1130	25-61 cm / 10-24″	10-15 kg / 22-33 lbs	●	✔	✔	✔	✔	Incl.	MIS-D	26 mm / 1″
VFW 030	25-77 cm / 10-30″	30 kg / 66 lbs	●	–	–	–	✔	Incl.	MIS-D	26 mm / 1″
VFW 130	25-77 cm / 10-30″	30 kg / 66 lbs	●	✔	–	–	✔	Incl.	MIS-D	50 mm / 2″

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

VFW 032
Flat display wall mount

SIZE 57-94 cm / 23-37″

MAX. 45 kg / 99 lbs

●

- Universal, complies with VESA MIS-D (100x100, 75x75 mm) and VESA MIS-E (200x100 mm)
- Strips included for 200x200 mm VESA mounting holes
- Fixed to the wall
- Minimal distance to the wall (30 mm / 1.2″)
- Easy mounting (mounting hardware included)

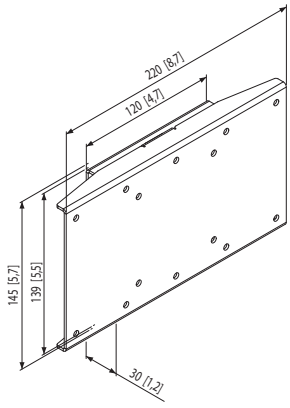

mm [inch]

VFW 132
Flat display wall mount

57-94 cm / 23-37″

45 kg / 99 lbs

●

- Universal, complies with VESA MIS-D (100x100, 75x75 mm) and VESA MIS-E (200x100 mm)
- Strips included for 200x200 mm VESA mounting holes
- Tilt function 10°
- Minimal distance to the wall (51 mm / 2″)
- Easy mounting (mounting hardware included)

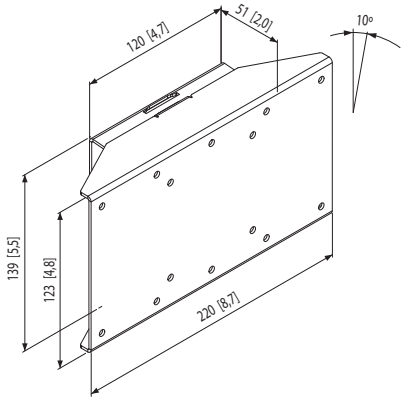

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Adjustability Turn	TüV	Interface	VESA	Distance to wall
VFW 032	57-94 cm / 23-37″	45 kg / 99 lbs	●	–	–	✔	Incl.	MIS-D-E	30 mm / 1,2″
VFW 132	57-94 cm / 23-37″	45 kg / 99 lbs	●	✔	–	✔	Incl.	MIS-D-E	51 mm / 2″

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

6000 SERIES

STYLISH WALL MOUNTS FOR CUSTOM INSTALL AND HOTELROOM USE

- The stylish and award winning wall mounting system for flat displays is especially usefull for luxury hotelrooms and custom install use.
- Unique features as the Smart Movement Mechanism (SMM™) with flat display/ wall protection, the very solid aluminium construction and autobalance tilting make the 6000 Series very suitable for luxury hotelroom use.
- Smart accessories as the column system with Audio/DVD mount make complete AV installation possible.

KEY USP'S 6000 SERIES

1. Solid aluminium construction
2. Forward movement
3. Smart Movement Mechanism (SMM™)
4. Screen Protection System (SPS®)

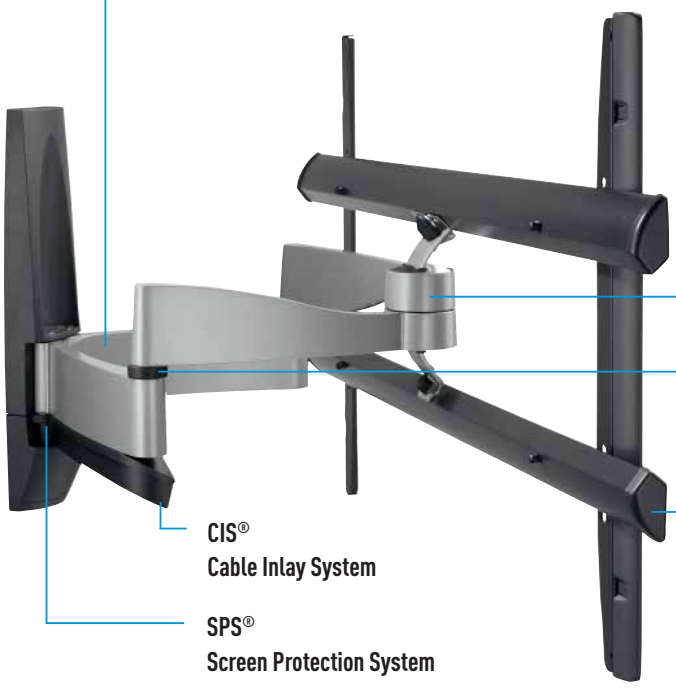

EFW 6445

EFW 6145
Flat display wall mount

SIZE 35-66 cm / 14-26″

MAX. 3-15 kg / 6-33 lbs

- Tilt, turn and reach functions guarantee optimal viewing position
- Universal, complies with VESA MIS-D (100x100, 75x75 mm)
- Pre-assembled - install in just 3 easy steps
- Strips included for 200x100 VESA mounting
- Unique Screen Protection System (SPS®) which protects both flat display and wall

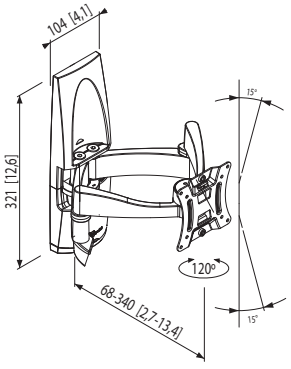

mm [inch]

EFW 6245
Flat display wall mount

57-94 cm / 23-37″

10-35 kg / 22-77 lbs

- Tilt, turn and reach functions guarantee optimal viewing position
- Universal, complies with VESA MIS-D (100x100, 75x75 mm) and VESA MIS-E (200x200 mm)
- Strips included for 200x200 VESA mounting
- Pre-assembled - install in just 3 easy steps
- Unique Screen Protection System (SPS®) which protects both flat display and wall*

* SPS® max. 900 mm / 35.4″ flat display width

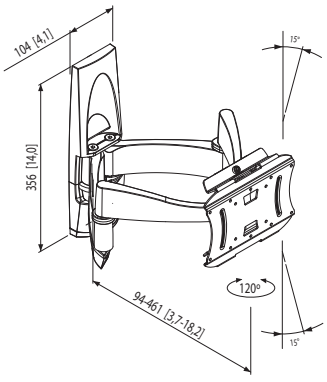

mm [inch]

EFW 6345
Flat display wall mount

81-127 cm / 32-50″

15-45 kg / 33-99 lbs

- Tilt, turn and reach functions guarantee optimal viewing position
- Universal, complies with VESA MIS-F (700x450 mm)
- Pre-assembled - install in just 3 easy steps
- Unique Screen Protection System (SPS®) which protects both flat display and wall*

* SPS® guaranteed up to 1450 mm

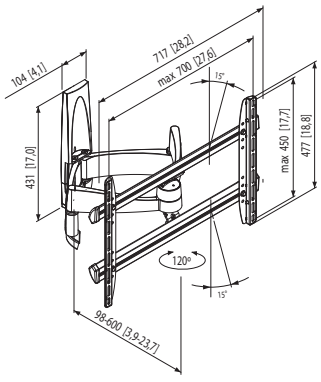

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Adjustability Turn	Lock	TüV	Interface	VESA	Distance to wall
EFW 6145	35-66 cm / 14-26″	3-15 kg / 6-33 lbs	●	✔	✔	–	✔	Incl.	MIS-D	68-340 mm
EFW 6245	57-94 cm / 23-37″	10-35 kg / 22-77 lbs	●	✔	✔	–	✔	Incl.	MIS-D-E	94-461 mm
EFW 6345	81-127 cm / 32-50″	15-45 kg / 33-99 lbs	●	✔	✔	–	✔	Incl.	MIS-F	98-600 mm

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

EFW 6445
Flat display wall mount

SIZE 107-165 cm / 42-65"

MAX. 15-55 kg / 33-121 lbs

- Tilt, turn and reach functions guarantee optimal viewing position
- Universal, complies with VESA MIS-F (950x550 mm)
- Pre-assembled - install in just 3 easy steps
- Unique Screen Protection System (SPS®) which protects both flat display and wall*

* SPS® guaranteed up to 1460x940 mm

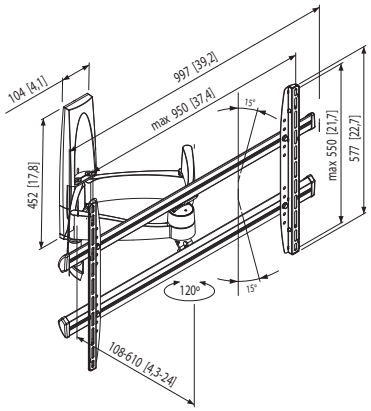

mm [inch]

EFA 6825
Audio/DVD support

–

10 kg / 22 lbs

- Can be positioned at any height in the column
- Adjustable arms, which are equipped with an anti-slip edge, fit a wide range of AV equipment sizes
- Combine with EFA 6840 to store AV equipment
- Pre-assembled - install in just 1 easy step

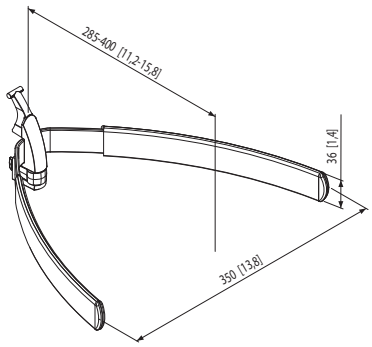

mm [inch]

EFA 6840
Column system

–

max. 4x EFA 6825

- 93 cm / 36.6"
- Flexible and unique AdvanCIS™ - easily hide and guide cables at any height
- Combine with EFA 6825 to store AV equipment
- Pre-assembled - install in just 1 easy step



mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV	Interface	VESA	Distance to wall
EFW 6445	107-165 cm / 42-65"	15-55 kg	●	✔	✔	–	✔	Incl.	MIS-F	108-610 mm
EFA 6825	–	10 kg	●	✔	✔	✔	✔	–	–	–
EFA 6840	–	max 4x EFA 6825	●	–	–	✔	✔	–	–	–

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

REMOTE CONTROLLED WALL MOUNT

LET YOUR FINGERS DO THE WALKING

- Especially for luxury custom install locations or high-end hotel rooms this excellent products offers the end user a unique viewing experience.
- The Glider offers an innovative super smooth movement mechanism with the Auto Home feature which automatically moves to a preset position when the flat display is switched on and returns to the home position when the TV is switched off.

KEY USP'S RC WALL MOUNT

1. **Remote controlled**
2. **Unique movement mechanism**
3. **"Auto home" automatically returns the flat display to the wall**
4. **Compatible with a learning universal remote control**

EFWE 6455 RC

Remote controlled

"Auto home" automatically returns the flat display to the wall

Smart Movement Mechanism SMM®

EFWE 6455 RC (Vogel's Glider®)

Remote controlled flat display wall mount

107-153 cm / 42-60"

70 kg / 154 lbs

- Unique Remote controlled movement
- Slides the flat display smoothly into the ideal viewing position
- Auto preset function at flat display switch on/off
- 3 preset memory positions
- 45° left or 45° right turn
- Universal, Complies with VESA MIS-F (911x550 mm)

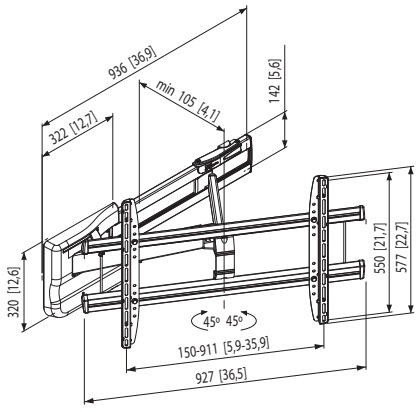

mm [inch]

SUPERB TROLLEYS AND STANDS

FOR EVERY PURPOSE

- "Brand Your Stand" is the key feature in the new Vogel's trolleys and stands. Create maximum communication power by adding your company logo/colours or campaign text on the trolley. This is very easy to do with a sticker or print on the removable front cover plate.
- In combination with a custom Vogel's TVskin® (page 57-59) you can create even more communication power. Your message on the flat display + TVskin + a branded trolley will give ultimate communication power.
- It is also possible to integrate a trolley into your interior with specific colours.
- Unique features such as full cable management including power sockets, easy and safe height adjustment and autolock® locking system.
- Creating a video conferencing stand is easy with the wide range of accessories, which also includes video camera holders and a dual display adapter.
- Stylish aluminium design.

PRODUCT CONFIGURATOR

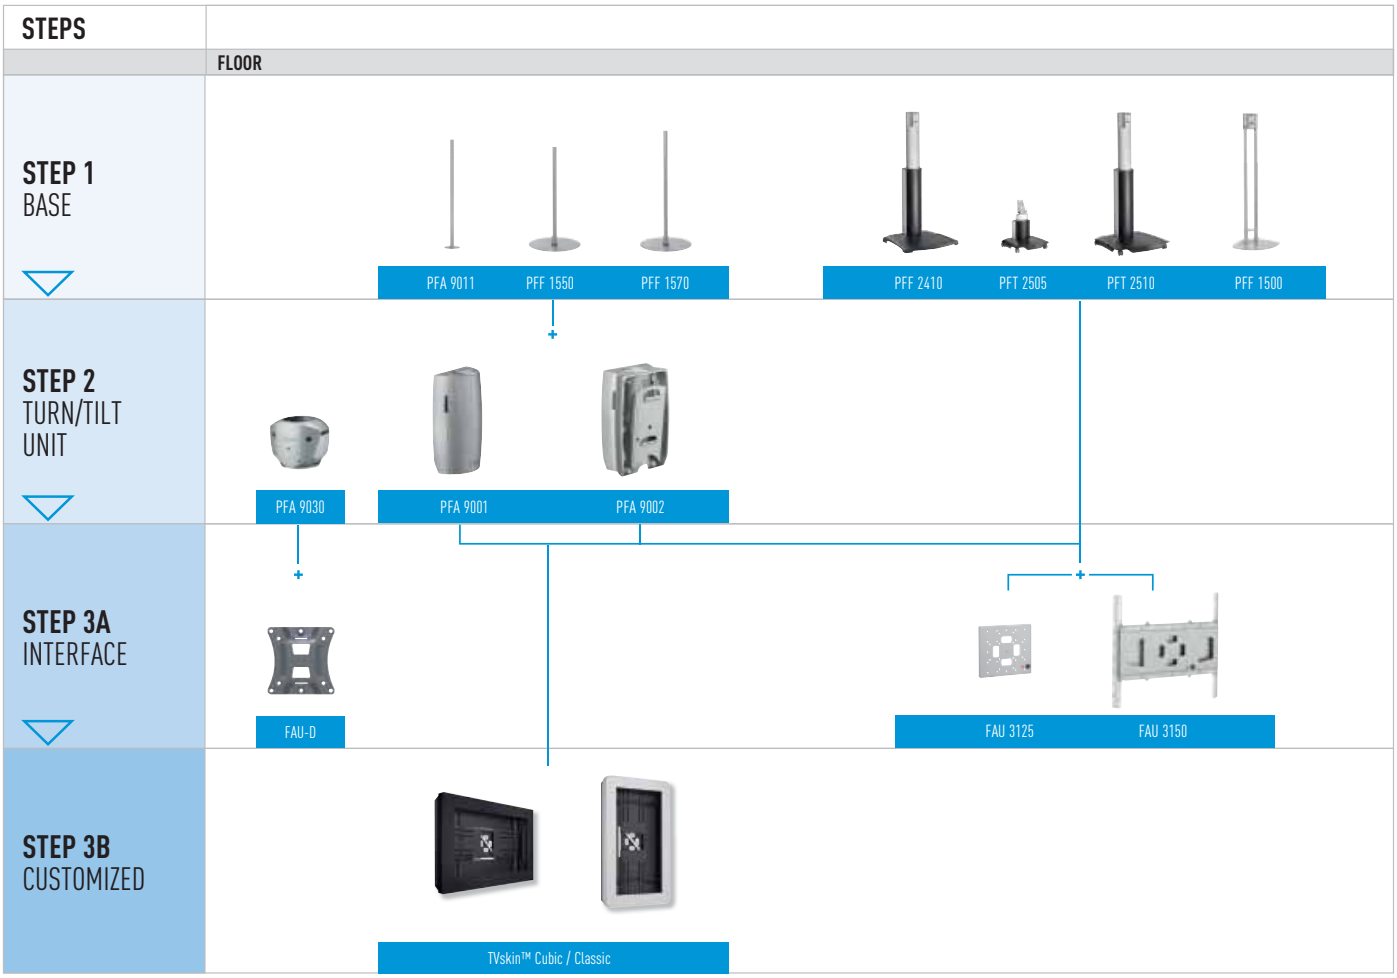

KEY USP'S TROLLEY AND FLOOR STANDS

1. **Brand your stand**
2. **Stylish design**
3. **Full cable management**
4. **Video conferencing**

Stylish design
The special design of these trolleys makes it possible to let them stand out or blend in with their environment. The choice is up to you.

PFT 2510

Video conferencing
The optional PFA 9050 dual display adapter and camera holder PFA 9035 or PFA 9051 make these trolleys and stands a perfect video conferencing solution.

Brand your stand
The front covers can be easily customized by adding a logo sticker or print. This creates extra communication power.

Hide cables
All cables can be neatly hidden in the column. There is even enough space under the base cover to attach an electric extension socket and store the rest of your cable.

PFF 2410
Flat display floor stand

SIZE 81-165 cm / 32-65"

MAX. 70 kg / 154 lbs

- "Brand your Stand" front (easy customizable front)
- Height adjustable (110-170 cm)
- Autolock® locking system
- Cable storage under the base cover
- CIS® Cable Inlay System
- Mounting hole for anti theft cable
- NOT INCLUDING interface FAU 3125 / FAU 3150 (see page 55)

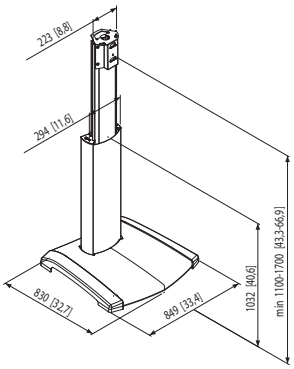

mm [inch]

PFT 2505
Flat display trolley

81-165 cm / 32-65"

70 kg / 154 lbs

- "Brand your Stand" front (easy customizable front)
- Height adjustable (59-64 cm)
- Autolock® locking system
- 10-60° tilting
- Cable storage under the base cover
- CIS® Cable Inlay System
- Mounting hole for anti theft cable
- NOT INCLUDING interface FAU 3125 / FAU 3150 (see page 55)

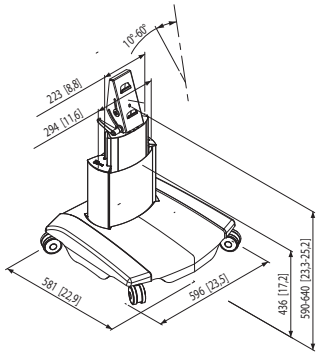

mm [inch]

PFT 2510
Flat display trolley

81-140 cm / 32-55"

55 kg / 121 lbs

- "Brand your Stand" front (easy customizable front)
- Height adjustable (113-177 cm)
- Autolock® locking system
- Cable storage under the base cover
- CIS® Cable Inlay System
- Mounting hole for anti theft cable
- NOT INCLUDING interface FAU 3125 / 3150 (see page 55)

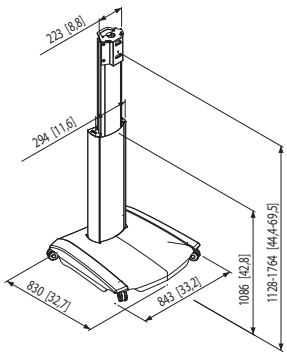

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV	Interface
PFF 2410	81-165 cm / 32-65"	70 kg / 154 lbs	●	–	✔	✔	✔P	–
PFT 2505	81-165 cm / 32-65"	70 kg / 154 lbs	●	✔	✔	✔	✔P	–
PFT 2510	81-140 cm / 32-55"	55 kg / 121 lbs	●	–	✔	✔	✔P	–

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PFA 9050
Dual display adapter

SIZE 81-132 cm / 32-52"

MAX. 90 kg (2x45 kg) / 198 lbs (2x 99 lbs)

●

- Suitable for PFF 2410 and PFT 2510
- Autolock® locking system
- Max. flat display width until 130 cm (51,2")

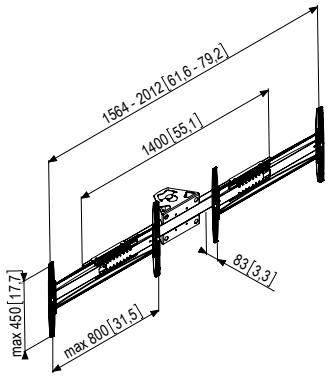

mm [inch]

PFA 9033
Accessory shelf

–

10 kg / 22 lbs

○

- Optional accessory shelf for PPT 2300 / PFF 2410 / PFT 2510
- Variable height positioning
- Multiple shelves per trolley / stand possible
- Can be mounted on front or back

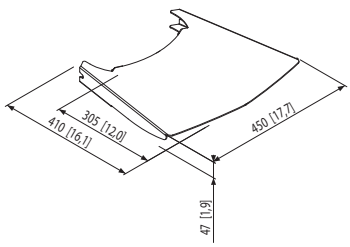

mm [inch]

PFA 9034
Locking cabinet

–

10 kg / 22 lbs

○

- Locking cabinet for eg. DVD player or laptop for PPT 2300 / PFF 2410 / PFT 2510
- Infra red transparant cover plate
- Lock + 2x key included
- Variable height positioning
- Can be mounted on front or back

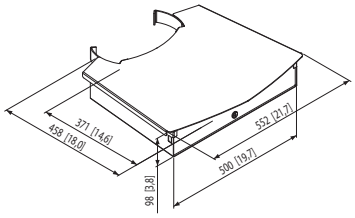

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV	Interface
PFA 9050	81-132 cm / 32-52"	90 kg (2x45 kg) / 198 lbs (2x99 lbs)	●	–	–	–	–	✔
PFA 9033	–	10 kg / 22 lbs	○	–	–	✔	✔P	–
PFA 9034	–	10 kg / 22 lbs	○	–	–	✔	✔P	–

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PFA 9035
Video conference camera holder

SIZE –

MAX. 10 kg / 22 lbs

●

- Video conference camera holder for PFF 2410 / PFT 2510
- Height adjustable

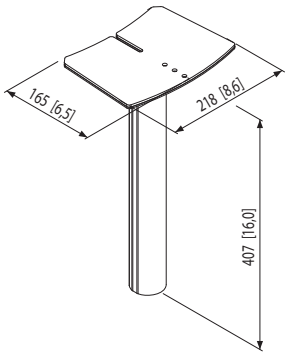

mm [inch]

PFA 9036
Set of 5 transparent front covers

–

–

–

- Set of 5 transparant front covers for PPT 2300 / PFF 2410 / PFT 2510
- Can be used for backlight purposes
- Including back reflector plate

PFA 9051
Video conference camera holder



–

10 kg / 22 lbs

●

- Must be combined with PFA 9050 dual display adapter
- Heigth adjustable
- Camera can be positioned above or below the displays

Available: Autumn 2010

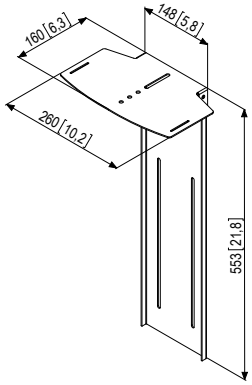

Type nr.	Max.	Colour	Adjustability Tilt	Adjustability Turn	Adjustability Height	TüV
PFA 9035	10 kg / 22 lbs	●	–	–	✔	✔P
PFA 9051	10 kg / 22 lbs	●	–	–	✔	✔P

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PFF 1000
Flat display floor stand

SIZE	38-66 cm / 15-26"
MAX.	15 kg / 33 lbs
	◒

- Compact
- Quick and easy to install
- VESA MIS D-E (100x100, 200x100, 200x200 mm)
- Cabinet for DVD-media player or small PC
- Cable management
- Mounting hole for security cable
- Option security lock PFA 9008 (see page 24)
- Strips included for 200x200mm VESA mounting

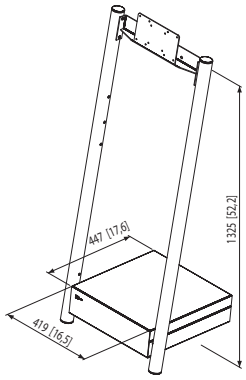

mm [inch]

PFA 9040
Poster holder for PFF 1000

	-
	-
	●

- Set of 2x U-shape strips to place an A2 size poster
- Gives extra communication power with PFF 1000



mm [inch]

PFA 9041
Keyboard shelf for PFF 1000

	-
	10 kg / 22 lbs
	●

- Keyboard shelf for PFF 1000

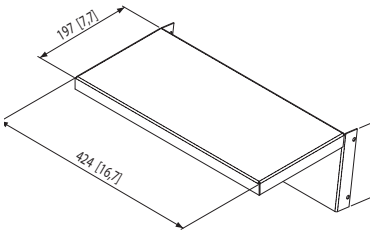

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	Lock	TüV	Interface	VESA
PFF 1000	38-66 cm / 15-26"	15 kg / 33 lbs	◒	✔	-	-	Option	-	Incl.	MIS-D-E
PFA 9040	-	-	●	-	-	-	-	-	-	-
PFA 9041	-	10 kg / 22 lbs	●	-	-	-	-	-	-	-

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PFF 1500
Flat display floor stand

SIZE	78-107 cm / 31-42"
MAX.	40 kg / 88 lbs
	●

- Sturdy design
- CIS® Cable Inlay System
- Adjustable height 1300-1700 mm (center flat display)
- Easy and compact in transport (only 2 components)
- NOT INCLUDING universal interface FAU 3125 / FAU 3150 (see page 55)

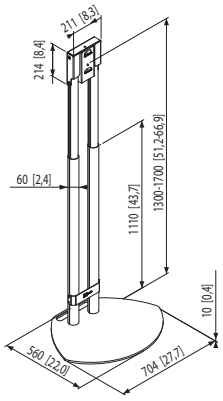

mm [inch]

PFA 9027
Accessory shelf for PFF 1500

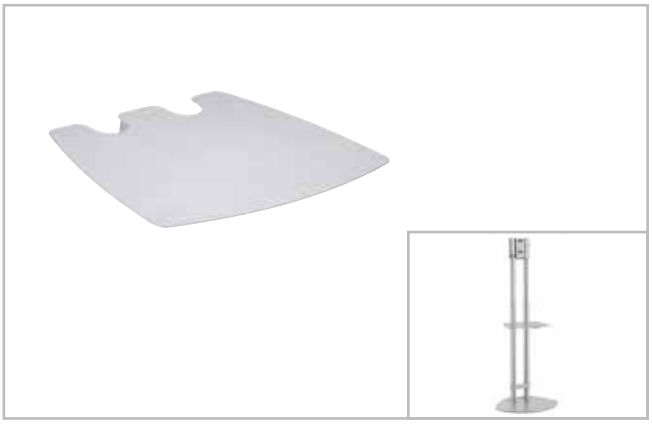

10 kg / 22 lbs
●

- Optional accessory shelf for PFF 1500
- Variable height positioning
- Multiple shelves per stand possible

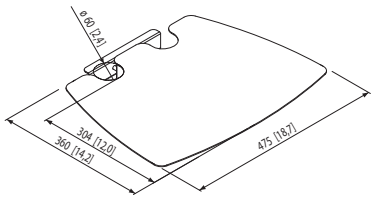

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV	Interface
PFF 1500	78-107 cm / 31-42"	40 kg / 88 lbs	●	–	–	✔	✔P	–
PFA 9027	–	10 kg / 22 lbs	●	–	–	✔	✔P	–

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PFF 1550
Flat display floor stand

SIZE 48-127 cm / 19-50"

MAX. 45 kg / 100 lbs

●

- Stylish design, brushed stainless steel
- CIS® Cable Inlay System
- Height 150 cm
- Adjustable feet
- Combine with turn & tilt unit PFA 9001 / PFA 9002 and universal interface FAU 3150 / FAU 3125 or combine with PFA 9030 and FAU-D (see page 54/55)

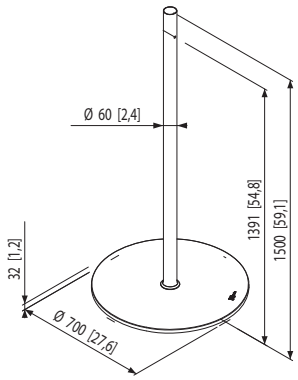

mm [inch]

PFF 1570
Flat display floor stand

48-107 cm / 19-42"

40 kg / 88 lbs

●

- Stylish design, brushed stainless steel
- CIS® Cable Inlay System
- Height 170 cm
- Adjustable feet
- Combine with turn & tilt unit PFA 9001 / PFA 9002 and universal interface FAU 3150 / FAU 3125 or combine with PFA 9030 and FAU-D (see page 54/55)

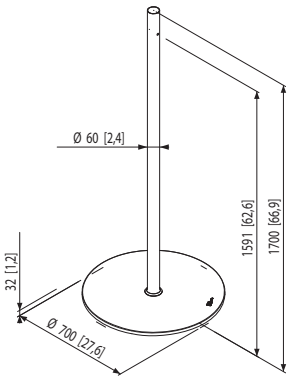

mm [inch]

PFA 9011
Flat display fixed floor stand

48-165 cm / 19-65"

60 kg / 132 lbs

●

- Stylish stainless steel floor stand, screw-mounted to the floor
- CIS® Cable Inlay System
- Height 180 cm
- Combine with turn & tilt unit PFA 9001 / PFA 9002 and universal interface FAU 3150 / FAU 3125 or combine with PFA 9030 and FAU-D (see page 54/55)



mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	Lock	TüV	Interface	VESA
PFF 1550	48-127 cm / 19-50"	45 kg / 100 lbs	●	–	✔	–	–	✔P	–	–
PFF 1570	48-107 cm / 19-42"	40 kg / 88 lbs	●	–	✔	–	–	✔P	–	–
PFA 9011	47-165 cm / 19-65"	60 kg / 132 lbs	●	–	✔	✔	–	✔P	–	–

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PFA 9038
Accessory shelf

SIZE –

MAX. 10 kg / 22 lbs

- Accessory shelf for PFA extension tubes PFA 9003 / 9004 / 9015 and PFF 1550 / PFF 1570 / PFA 9011 floor stands

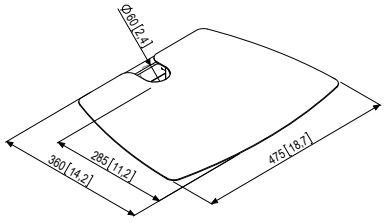

mm [inch]

PFA 9001
Turn & tilt unit

SIZE –

MAX. 60 kg / 132 lbs

- Autolock® locking system
- Fits on PFA extension tubes and standard 60 mm tubes
- Turn and 20° tilt function
- Suitable for interfaces FAU 3125 or FAU 3150 (see page 55)

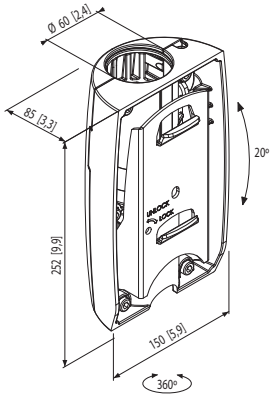

mm [inch]

PFA 9002
Turn & tilt unit for 2 flat displays back-to-back

–

(2x) 60 kg / (2x) 132 lbs (balanced)

- Autolock® locking system
- Fits on PFA extension tubes and standard 60 mm tubes
- Turn and 20° tilt function
- Suitable for 2x interfaces FAU 3125 or FAU 3150 (see page 55)

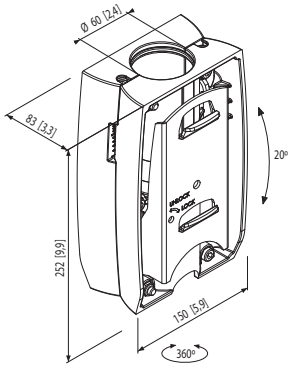

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV
PFA 9038	–	10 kg / 22 lbs	●	–	–	✔	✔P
PFA 9001	–	60 kg / 132 lbs	● ●	–	–	–	✔P
PFA 9002	–	(2x) 60 kg / (2x) 132 lbs	● ●	–	–	–	✔P

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PFA 9030
Turn & tilt unit

≤ 26"

20 kg / 44 lbs

- Fits on PFF 1550/1570 or PFA 9011
- Turn and 15° tilt function
- Suitable for:
  - 1 x FAU-D interface for single flat display
  - 2 x FAU-D interface for 2 flat displays back-to-back

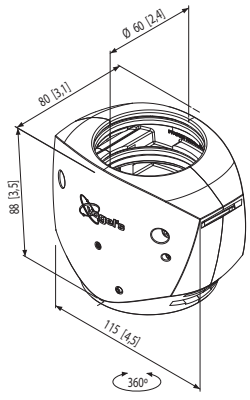

mm [inch]

FAU-D
Universal flat display interface, VESA MIS-D

SIZE
30-58 cm
12-23"

MAX.
12 kg
26 lbs

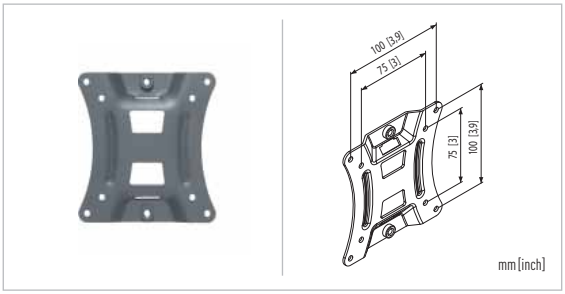

mm [inch]

- Use in combination with PFA 9030
- 100x100 mm mounting

FAU 3125
Universal flat display interface, VESA MIS-D-E

SIZE
58-101 cm
23-40"

MAX.
60 kg
132 lbs

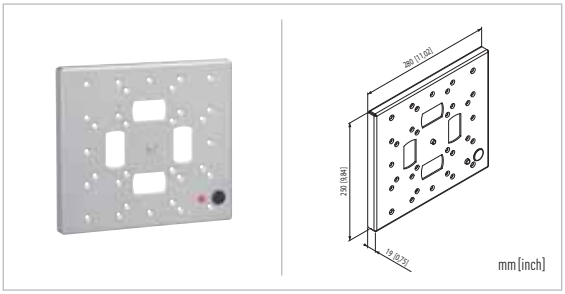

mm [inch]

- VESA MIS-D-E (including 75x75, 100x100, 200x100, 200x200 mm mounting)
- Autolock® locking system
- Landscape or portrait mounting
- Optional anti-theft lock PFA 9008 (see page 24)

FAU 3150
Universal flat display interface, VESA MIS-F

SIZE
76-165 cm
30-65"

MAX.
70 kg
154 lbs

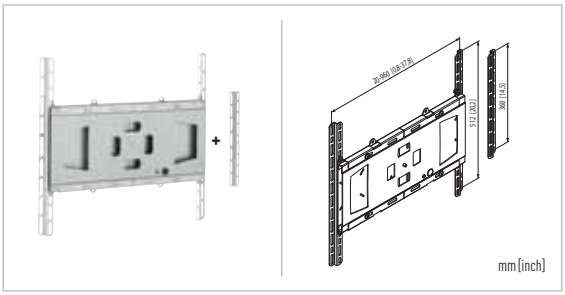

mm [inch]

- VESA MIS-F (max. 960x512 mm)
- VESA MIS-D-E possible
- Autolock® locking system
- Landscape or portrait mounting
- Optional anti-theft lock PFA 9008 (see page 24)

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV	VESA
PFA 9030	≤ 26"	20 kg / 44 lbs	○	✔	✔	✔	✔P	–
FAU-D	30-58 cm / 12-23"	12 kg / 26 lbs	●	–	–	–	✔	MIS-D
FAU 3125	58-101 cm / 23-40"	60 kg / 132 lbs	○ ●	–	–	–	✔P	MIS-D-E
FAU 3150	76-165 cm / 30-65"	70 kg / 154 lbs	○ ●	–	–	–	✔P	MIS-F

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PB 175
Flat display trolley

SIZE 91-127 cm / 36-50"

MAX. 50 kg / 110 lbs

- Basic / economy model
- Including universal interface (max. 670 x 510 mm)
- 3 accessory trays
- 4 big castors, 2 with brakes
- Fast and easy to assemble
- Max. load shelve 10 kg / 22 lbs



mm [inch]

PB 150
Flat display trolley

91-127 cm / 36-50"

50 kg / 110 lbs

- Basic / economy model
- Including universal interface (max. 670 x 510 mm)
- 3 accessory trays
- 4 big castors, 2 with brakes
- Fast and easy to assemble
- Max. load shelve 10 kg / 22 lbs



mm [inch]

PB 100
Flat display trolley

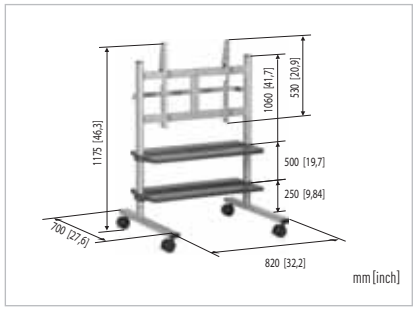

mm [inch]

91-127 cm / 36-50"

50 kg / 110 lbs

- Basic / economy model
- Including universal interface (max. 670 x 510 mm)
- 2 accessory trays
- 4 big castors, 2 with brakes
- Fast and easy to assemble
- Max. load shelve 10 kg / 22 lbs

PB 050
Flat display table stand

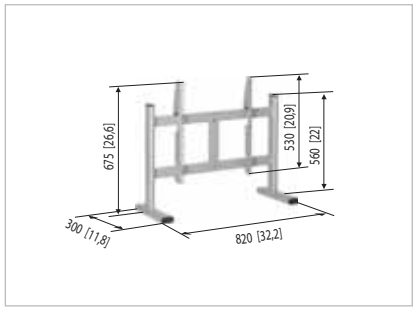

91-127 cm / 36-50"

50 kg / 110 lbs

- Basic / economy model
- Including universal interface (max. 670 x 510 mm)
- Fast and easy to assemble

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV	Interface	VESA
PB 175	91-127 cm / 36-50"	50 kg / 110 lbs	●	–	–	–	–	Incl.	MIS-F
PB 150	91-127 cm / 36-50"	50 kg / 110 lbs	●	–	–	–	–	Incl.	MIS-F
PB 100	91-127 cm / 36-50"	50 kg / 110 lbs	●	–	–	–	–	Incl.	MIS-F
PB 050	91-107 cm / 36-42"	50 kg / 110 lbs	○	–	–	–	–	Incl.	MIS-F

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

TVSKIN

CUSTOMIZE YOUR FLAT DISPLAY

Vogel's TVskin® is a creative and custom enclosure for professional flat displays to get maximum communication power in digital signage applications.

(42" display without TVskin) (42" display with TVskin)

KEY USP'S VOGEL'S TVskin®

1. **Create eye catching flat displays which will stand out**
2. **More effective-commercial pixels**
3. **Better communication power**
4. **Protection of flat display and cables**

1. TVskin front
The TVskin front is the eye catching part of the TVskin. It is available in different models, Cubic and Classic.

2. TVskin flat display interface
The TVskin flat display interface is the backbone of TVskin. It holds the flat display, the front cover and the back cover.

3. TVskin back
The optional back cover gives a smartly finished look but also gets cables out of sight and prevents tampering with the cables and connectors.

Easy to install
TVskin can be mounted to all Vogel's modular ceiling, wall or floor mounts.

Easy to customize
From an add-on sticker, to custom colours right through to a full custom design. Both landscape and portrait position are possible.

More commercial pixels
TVskin gives more commercial pixels because company colours and logo's are on the TVskin, this pixel space is not needed on the flat display anymore and gives more space for your messages.

1 2 3

PTS CL40S
Front Classic 40"

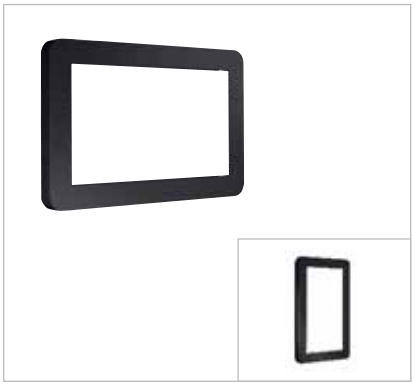

SIZE 102 cm / 40"

MAX. –

- Steel front
- Easy installation and maintenance
- Fits on the modular Vogel's Professional products
- Can be used landscape or portrait position
- To be combined with PTS FAU and PTS 042S
- Any colour and/or custom logo is possible

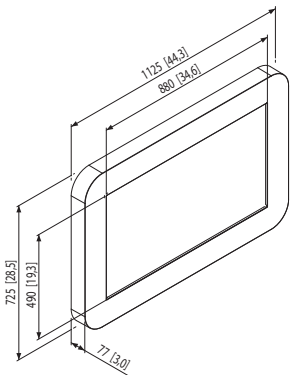

mm [inch]

PTS CL42S
Front Classic 42"

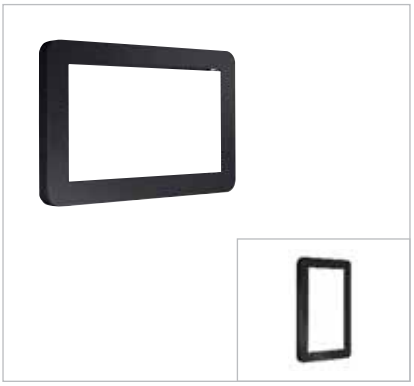

107 cm / 42"

–

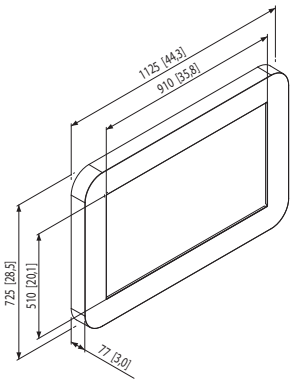

mm [inch]

PTS CB40S
Front Cubic 40"

102 cm / 40"

–

- Steel front
- Easy installation and maintenance
- Fits on the modular Vogel's Professional products
- Can be used landscape or portrait position
- To be combined with PTS FAU and PTS 042S
- Any colour and/or custom logo is possible

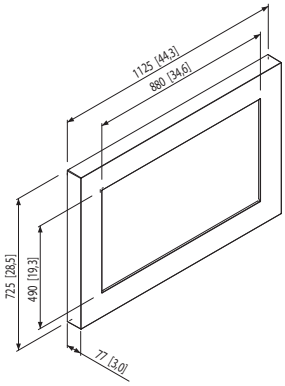

mm [inch]

Type nr.		Colour	Interface
PTS CL40S	102 cm / 40"	● ○	–
PTS CL42S	107 cm / 42"	● ○	–
PTS CB40S	102 cm / 40"	● ○	–

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PTS CB42S
Front Cubic 42"

SIZE 107 cm / 42"

MAX. –

● ○

- Steel front
- Easy installation and maintenance
- Fits on the modular Vogel's Professional products
- Can be used landscape or portrait position
- To be combined with PTS FAU and PTS 042S
- Any colour and/or custom logo is possible

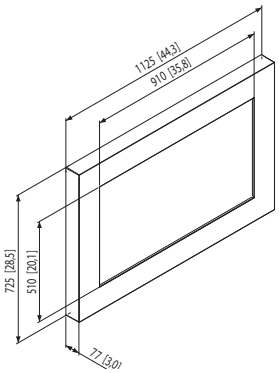

mm [inch]

PTS 042S
Back 40"/42" for TVskin

102-107 cm / 40-42"

–

●

- Back cover, preventing tampering with cables and connectors and creates a smooth look
- To be combined with PTS models and PTS FAU



mm [inch]

PTS FAU
Flat display interface 40"/42" for TVskin®



102-107 cm / 40-42"

70 kg / 154 lbs

●

- Interface to mount front, flat display and back
- To be combined with PTS models

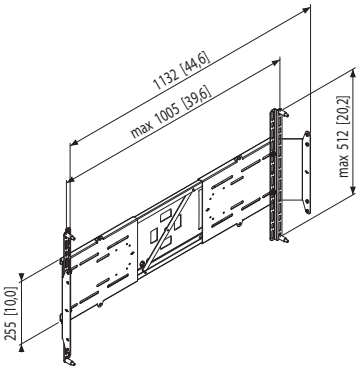

mm [inch]

Type nr.		Max.	Colour	TüV	VESA
PTS CB42S	107 cm / 42"	–	● ○	–	–
PTS 042S	102-107 cm / 40-42"	–	●	–	–
PTS FAU	102-107 cm / 40-42"	70 kg / 154 lbs	●	✔P	MIS-F

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PROJECTOR MOUNTS

For projectors Vogel's offers proven quality with the PPC Series of projector mounts. They are height adjustable, include a universal projector interface and security screws. Features such as CIS® Cable Inlay System and a multi-purpose ceiling plate come standard.

STEPS	PROJECTOR CEILING MOUNTS
STEP 1 BASE	PFA 9005 PFA 9009 PFA 9010 PFA 9021
STEP 2 POLE	PFA 9003 PFA 9004 PFA 9015 PFA 9016
STEP 3 TURN/TILT UNIT	
STEP 4A INTERFACE	VPC 545 PPC 200
STEP 4B CUSTOMIZED	PPA 305 PPA 301

KEY USP'S PROJECTOR MOUNTS

1. Height adjustable
2. Secure click in/out mechanism
3. Cable management
4. Universal projector interface

Height adjustable

Cable management

Secure click in/out mechanism

Universal projector interface

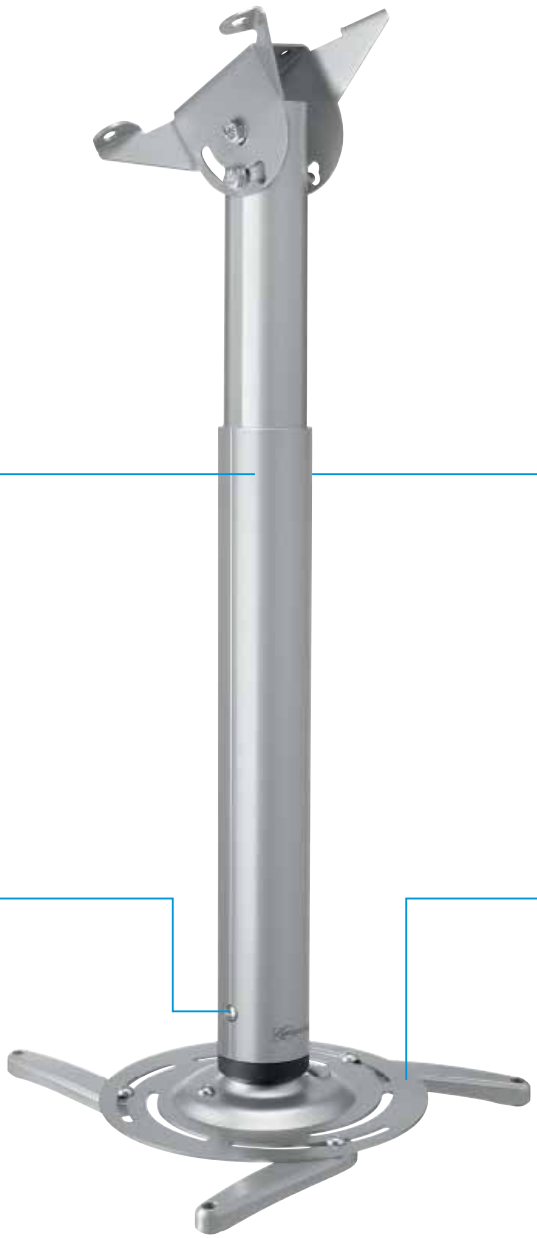

PPC 280

PFA 9010
Ceiling plate

MAX. (2x) 60 kg / (2x) 132 lbs (balanced)

- Ceiling plate for PFA extension tubes
- Suitable for flat and sloping ceilings
- Also suitable for vertical use on walls
- Cover included

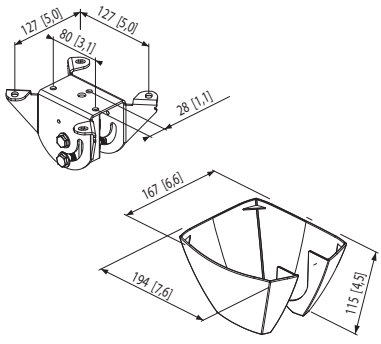

mm [inch]

PFA 9005
Ceiling plate

(2x) 60 kg / (2x) 132 lbs (balanced)

- Ceiling plate for PFA extension tubes



mm [inch]

PFA 9020
Extra strong ceiling plate

(2x) 60 kg / (2x) 132 lbs (balanced)

- Especially for long extension tubes, i.e. PFA 9004

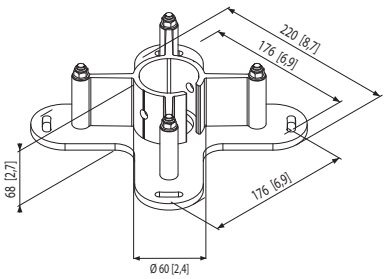

mm [inch]

Type nr.	Max.	Colour	TüV
PFA 9010	(2x) 60 kg / (2x) 132 lbs	● ●	✔P
PFA 9005	(2x) 60 kg / (2x) 132 lbs	● ●	✔P
PFA 9020	(2x) 60 kg / (2x) 132 lbs	●	✔P

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PFA 9009
Truss adapter

–

MAX. 60 kg / 132 lbs

- Adapter for attaching extension tubes to 51 mm truss systems

PFA 9003/9004/9015/9016
Extension tubes

–

(2x) 60 kg / (2x) 132 lbs (balanced)

PFA 9016

- CIS® Cable Inlay System, no need to cut plugs
- Aluminium, easy to cut to length

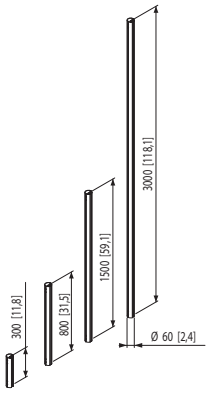

mm [inch]

VPC 545
Projector ceiling mount

30-323 mm / 1.18-12.7"

10 kg / 22 lbs

- Fits virtually all projectors weighing up to 10 kg/22 lbs
- Tilt and roll function for optimal viewing position
- Special anti-theft screws
- Including 4 metal mounting arms
- Easy servicing with secure click in/out mechanisme
- Easy mounting

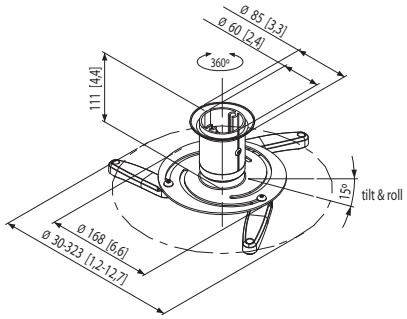

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV
PFA 9009	–	60 kg / 132 lbs		–	–	–	✔P
PFA 9003/9004/9015/9016	–	(2x) 60 kg / (2x) 132 lbs	PFA 9016	–	–	–	✔P
VPC 545	30-323 mm / 1.18-12.7"	10 kg / 22 lbs		✔	✔	–	✔P

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PPC 200
Projector ceiling mount

	40-420 mm / 1.6-16.5"
MAX.	20 kg / 44 lbs
	●

- Fits virtually all projectors weighing up to 20 kg/44 lbs
- Tilt and roll functions for optimal viewing position
- Special anti-theft screws
- Including 4 metal mounting arms
- Including special M6 inserts
- Easy mounting

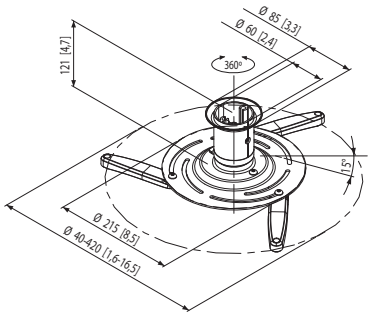

mm [inch]

PPA 305
Projector anti-theft housing



	–
	–
	●

- Heavy-duty steel housing
- For compact projectors
- Use in combination with ceiling plate, extension tube and projector ceiling mount



mm [inch]

PPA 301
Projector anti-theft housing

	–
	–
	●

- Heavy-duty steel housing
- For large projectors
- Use in combination with ceiling plate, extension tube and projector ceiling mount



mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV
PPC 200	40-420 mm / 1.6-16.5"	20 kg / 44 lbs	●	✔	✔	–	✔P
PPA 305	–	–	●	–	–	–	–
PPA 301	–	–	●	–	–	–	–

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

PPC 130
Projector ceiling mount

30-323 mm / 1.18-12.7"

MAX. 10 kg / 22 lbs

- Ceiling plate for flat and sloping ceilings
- Height adjustable, 309-398 mm
- CIS® Cable Inlay System
- Tilt and roll functions guarantee optimal viewing position
- Special anti-theft screws
- Including 4 metal mounting arms
- Easy servicing with secure click in/out mechanism
- Easy mounting



mm [inch]

PPC 150
Projector ceiling mount

30-323 mm / 1.18-12.7"

10 kg / 22 lbs

- Ceiling plate for flat and sloping ceilings
- Height adjustable, 531-804 mm
- CIS® Cable Inlay System
- Tilt and roll functions guarantee optimal viewing position
- Special anti-theft screws
- Including 4 metal mounting arms
- Easy servicing with secure click in/out mechanism
- Easy mounting



mm [inch]

PPC 180
Projector ceiling mount

30-323 mm / 1.18-12.7"

10 kg / 22 lbs

- Ceiling plate for flat and sloping ceilings
- Height adjustable, 829-1404 mm
- CIS® Cable Inlay System
- Tilt and roll functions guarantee optimal viewing position
- Special anti-theft screws
- Including 4 metal mounting arms
- Easy servicing with secure click in/out mechanism
- Easy mounting

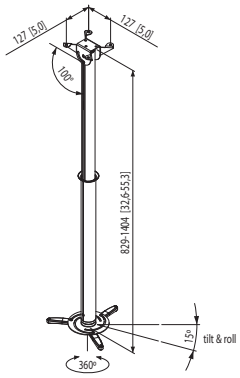

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV
PPC 130	30-323 mm / 1.18-12.7"	10 kg / 22 lbs	●	✔	✔	✔	✔P
PPC 150	30-323 mm / 1.18-12.7"	10 kg / 22 lbs	●	✔	✔	✔	✔P
PPC 180	30-323 mm / 1.18-12.7"	10 kg / 22 lbs	●	✔	✔	✔	✔P

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PPC 230
Projector ceiling mount

40-420 mm / 1.6-16.5"

MAX. 20 kg / 44 lbs

- Ceiling plate for flat and sloping ceilings
- Height adjustable, 319-408 mm
- CIS® Cable Inlay System
- Tilt and roll functions for optimal viewing position
- Special anti-theft screws
- Including 4 metal mounting arms
- Including special M6 inserts
- Easy mounting



mm [inch]

PPC 250
Projector ceiling mount

40-420 mm / 1.6-16.5"

20 kg / 44 lbs

- Ceiling plate for flat and sloping ceilings
- Height adjustable, 540-814 mm
- CIS® Cable Inlay System
- Tilt and roll functions for optimal viewing position
- Special anti-theft screws
- Including 4 metal mounting arms
- Including special M6 inserts
- Easy mounting



mm [inch]

PPC 280
Projector ceiling mount

40-420 mm / 1.6-16.5"

20 kg / 44 lbs

- Ceiling plate for flat and sloping ceilings
- Height adjustable, 840-1414 mm
- CIS® Cable Inlay System
- Tilt and roll functions for optimal viewing position
- Special anti-theft screws
- Including 4 metal mounting arms
- Including special M6 inserts
- Easy mounting

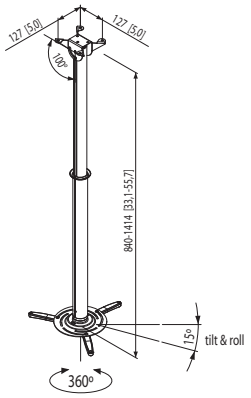

mm [inch]

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	TüV
PPC 230	40-420 mm / 1.6-16.5"	20 kg / 44 lbs	●	✔	✔	✔	✔P
PPC 250	40-420 mm / 1.6-16.5"	20 kg / 44 lbs	●	✔	✔	✔	✔P
PPC 280	40-420 mm / 1.6-16.5"	20 kg / 44 lbs	●	✔	✔	✔	✔P

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PPT 2300
Projector trolley

MAX. 25 kg / 55 lbs

- "Brand your Stand" front (easy customizable front)
- Height adjustable (84-122 cm)
- Cable storage under the base cover
- Mounting hole for anti theft cable
- Optional anti theft bars, PFA 9037
- CIS® Cable Inlay System

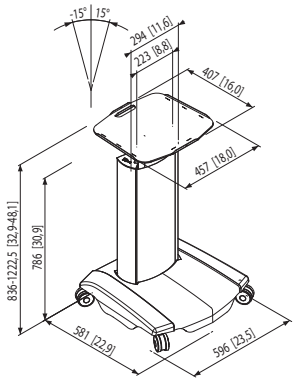

mm [inch]

PFA 9033
Accessory shelf for PPT 2300

• See page 49 for more details

PFA 9034
Locking cabinet for PPT 2300

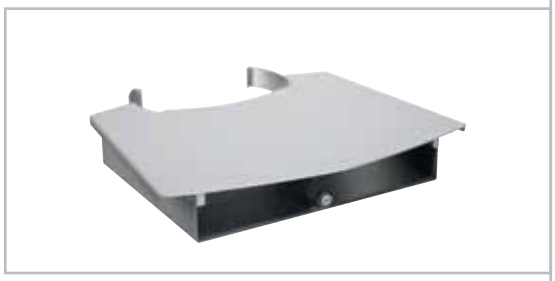

• See page 49 for more details

PFA 9037
Projector security for PPT 2300

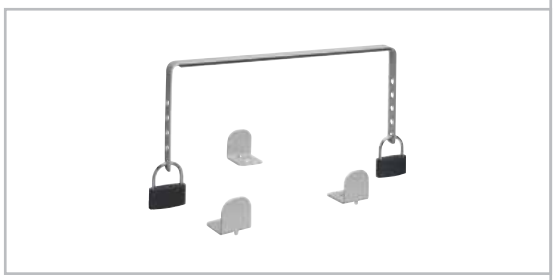

- Projector security kit for PPT 2300
- 2x Padlock included

Type nr.	Max.	Colour	Adjustability Tilt	Turn	Height	TüV
PPT 2300	25 kg / 55 lbs	●	–	–	✔	✔P

✔P = TüV for Professional use, ✔ = TüV
Visit www.vogels.com for more information.

SHORT THROW PROJECTOR MOUNTS

FULLY ADJUSTABLE

Short Throw projectors are the latest development in projectors. They offer several new advantages, such as no problems with shadow, less blinding light for the presenter and they are easier to install, given that they are wall mounted. Short Throw projectors do however require a special mount and Vogel's has introduced a full range of Short Throw projector mounts. A stylish but extra strong aluminium construction designed for use in both educational and business applications.

KEY USP'S PROJECTOR MOUNTS

1. **Fully adjustable**
2. **Fine tune adjustment**
3. **Safe & secure**
4. **Stylish design**

PPS 350 / PPS 500 / PPS 800
Three models in different lengths to make an optimum fit for nearly every available Short Throw projector.

PPS 801, has a swivel function
The PPS 801 has a swivel function and can be turned to the wall when the projector is not used. The projector is out of range and so more safe and secure. A special locking mechanism can even secure the projector to the wall.

PPS 230 for Sanyo PLC XL50/XL51
This Short Throw projector mount includes a dedicated projector interface for the Sanyo PLC XL50/XL51. Of course it is depth and height adjustable, has fine-tuning and even a limited swivel functionality.

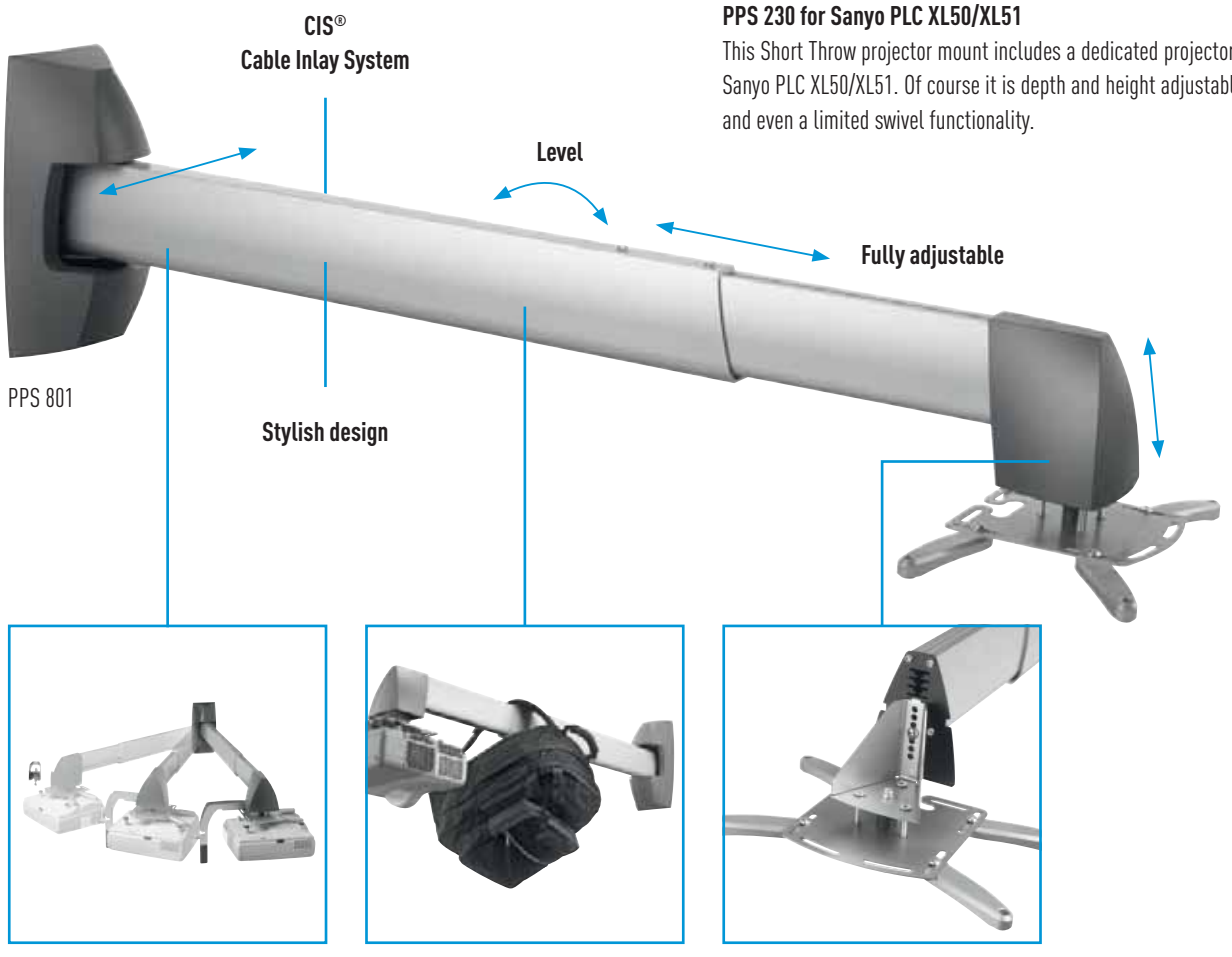

Swivel arm
Turn the projector out of range with PPS 801.

Safe & secure
Vogel's Short Throw projector mounts are designed with heavy use in mind. Security screws are included.

Fine tune adjustment, VFT™
Precise calibration of the projector interface.

PPS 230
Short Throw projector mount

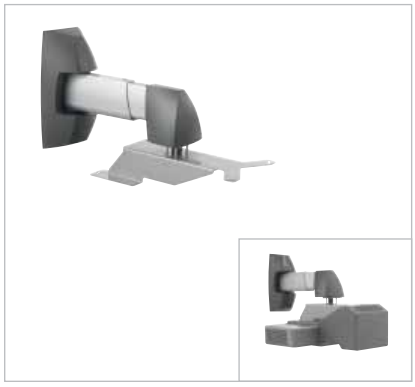

Dedicated for Sanyo PLC XL50/XL51

MAX. 15 kg / 33 lbs

- Dedicated projector interface for Sanyo PLC XL50/XL51
- Arm length 320-380 mm / 13-15"
- Fully adjustable
  - length
  - height
  - horizontal
  - leveling of arm
- Fine tune mechanism VFT™ for setting and keeping the projector exactly positioned
- Strong and sturdy construction for education use

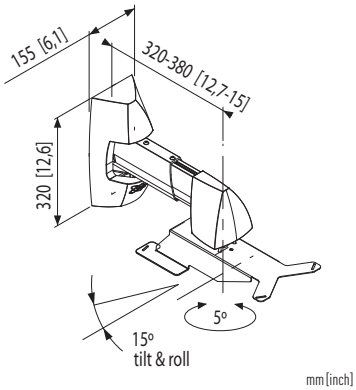

mm [inch]

PPS 350
Short Throw projector mount

20-380 mm / 1-15"

15 kg / 33 lbs

- Universal projector interface
- Arm length 440-620 mm / 17-24"
- Fully adjustable
  - length
  - height
  - horizontal
  - leveling of arm
- Fine tune mechanism VFT™ for setting and keeping the projector exactly positioned
- Strong and sturdy construction for education use

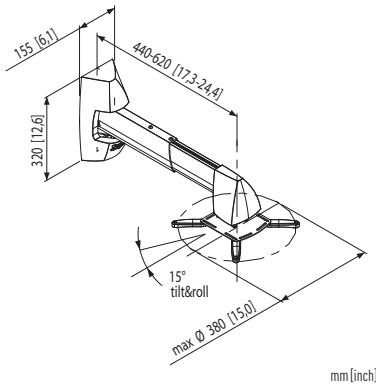

mm [inch]

PPS 500
Short Throw projector mount

20-380 mm / 1-15"

15 kg / 33 lbs

- Universal projector interface
- Arm length 590-920 mm / 23-36"
- Fully adjustable
  - length
  - height
  - horizontal
  - leveling of arm
- Fine tune mechanism VFT™ for setting and keeping the projector exactly positioned
- Strong and sturdy construction for education use

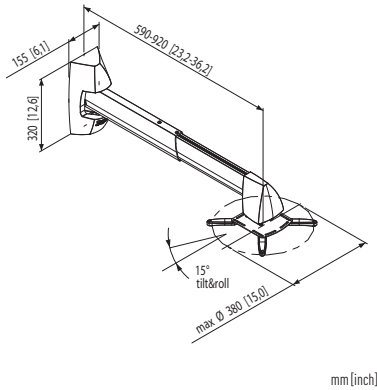

mm [inch]

Type nr.		Max.	Colour	Adjustability						TüV	Interface	Distance to wall
				Tilt	Turn	Horizontal	Height	VFT fine tune	Swivel arm			
PPS 230	Sanyo PLC XL50/XL51	15 kg / 33 lbs	●	✔	✔	✔	✔	✔	–	✔P	Incl.	320-380 mm / 13-15"
PPS 350	20-380 mm / 1-15"	15 kg / 33 lbs	●	✔	✔	✔	✔	✔	–	✔P	Incl.	440-620 mm / 17-24"
PPS 500	20-380 mm / 1-15"	15 kg / 33 lbs	●	✔	✔	✔	✔	✔	–	✔P	Incl.	590-920 mm / 23-36"

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PPS 800
Short Throw projector mount

20-380 mm / 1-15"

MAX. 15 kg / 33 lbs

- Universal projector interface
- Arm length 890-1520 mm / 35-60"
- Fully adjustable
  - length
  - height
  - horizontal
  - leveling of arm
- Fine tune mechanism VFT™ for setting and keeping the projector exactly positioned
- Strong and sturdy construction for education use

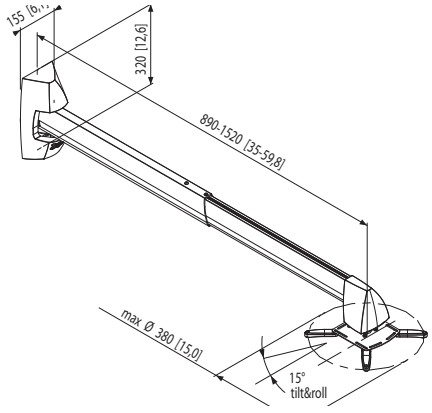

mm [inch]

PPS 801
Short Throw projector mount

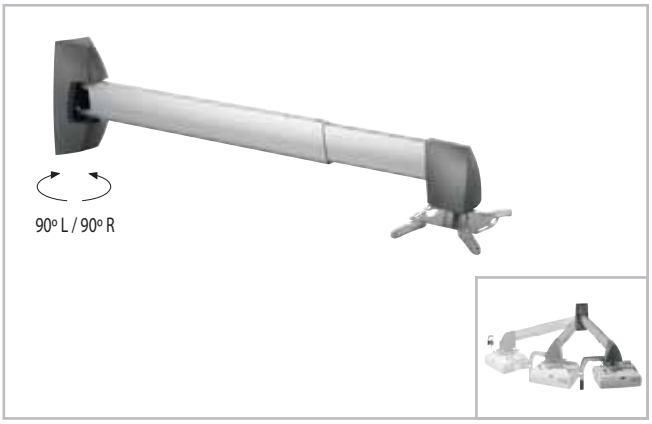

20-380 mm / 1-15"

15 kg / 33 lbs

- Swivel arm
- Universal projector interface
- Arm length 1012-1556 mm / 40-61"
- Fully adjustable
  - length
  - height
  - horizontal
  - leveling of arm
- Fine tune mechanism VFT™ for setting and keeping the projector exactly positioned
- Strong and sturdy construction for education use

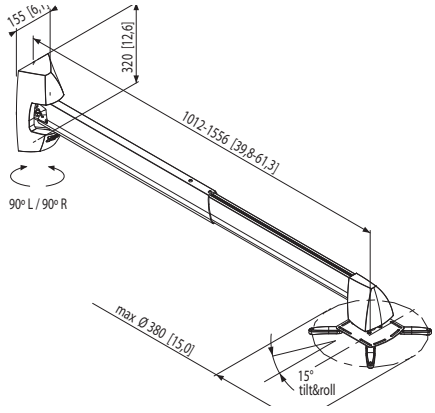

mm [inch]

Type nr.		Max.	Colour	Adjustability						TüV	Interface	Distance to wall
				Tilt	Turn	Horizontal	Height	VFT fine tune	Swivel arm			
PPS 800	20-380 mm / 1-15"	15 kg / 33 lbs		✔	✔	✔	✔	✔	–	✔P	Incl.	890-1520 mm / 35-60"
PPS 801	20-380 mm / 1-15"	15 kg / 33 lbs		✔	✔	✔	✔	✔	✔	✔P	Incl.	1012-1556 mm / 40-61"

✔P = TüV for Professional use, ✔ = TüV

Visit www.vogels.com for more information.

PPSA 100
Wall lock for PPS 801

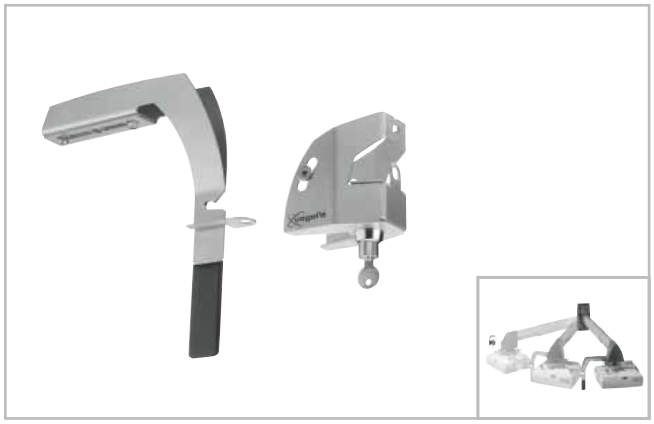

- Special wall lock to secure PPS 801 arm to the wall
- Can be used left and right sided
- Kit includes wall lock + special handgrip for PPS 801



mm [inch]

PPSA 200
Security cage for PPS 801

- Security cage for PPS 801
- Lock included
- Can be used left and right sided

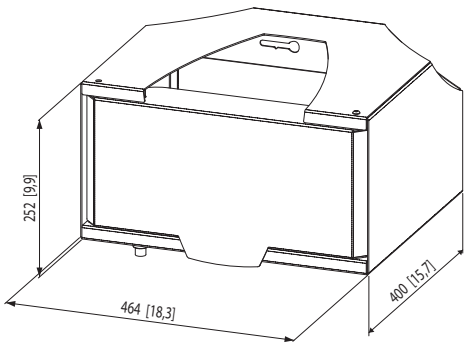

mm [inch]

PROJECTOR LIFT SYSTEMS

FOR EASY AND QUICK PROJECTOR SERVICE

The Vogel's PPL Series of projector lift systems is designed for the heavy-duty side of the professional AV market. The projector lift systems make quick and easy service to high positioned projectors possible thus keeping downtime to a minimum. The PPL lift systems are used worldwide in both civil and military control rooms, the largest theme parks, theatres, universities and boardrooms.

- PPL lift systems are available in lengths of 1, 1.8, 4.2 and 7.2 meters length.
- A universal projector interface will fit nearly every projector. For very large projectors dedicated mounts can be made available on request.
- The highly professional design and unique features make this the best choice possible.

KEY USP'S LIFT SYSTEMS

1. **5 remote control in/outputs**
2. **Super accurate height positions**
3. **Home, Show and Service positions**
4. **Maximum safety**

Built in remote control options
On nearly every projector lift you want to use an external control. This can be an AMX or Crestron automation system, a wall switch or a wireless device.

All PPL lift systems are as standard equipped with a control box offering 5 in and outputs for remote control. This gives you maximum flexibility to control the lifts system.

Three height positions
Most lift systems offer only two height positions, Home and Show. Vogel's PPL lift systems offer a third position, Service. This position will bring the projector all the way down to a comfortable height to make quick and easy projector service possible.

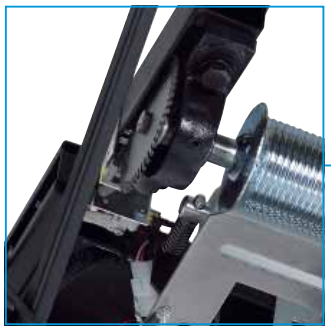

Electronic height positioning
The electronic height positioning is very accurate, also on long term, resulting in an always exact positioned projector image. The second advantage is that you can set the height positions remote. There is no need to climb up to the projector anymore. You can even set the positions from a control room.

Special cable drum
All PPL lift systems have a special grooved cable drum and pinch rollers. This ensures that the steel cables are always in the same position on the cable drum, keeping the projector and image exactly positioned. With traditional tube motors there is the risk cables wind back over each other resulting in a mis-balance of the projector and image. The grooved cable drum prevents this.

PPL 2525

Cable management
Cable clips make it possible to secure the projector power and signal cables safely to scissors.

Unique cable safety sensor
If the descending platform is blocked for some reason the cables could run of the cable drum. The cable safety sensor prevents this. If the steel cables do not run straight down and make contact with the sensor, the lift will automatically stop.

Self diagnostics
The built in self diagnostics, with indication LED, constantly monitors the operation of the lift system.

PPL 1515
Projector lift system

130-500 mm / 5,1-19,6"

MAX. 15 kg / 33 lbs (projector interface load)

●

- Max. drop down distance of 1 meter
- For small/medium size projectors
- Compact design, height 12.7 cm (excl. projector)
- Microprocessor operation with electronic height setting
- Whisper quiet operation
- 2 programable positions, show and service
- Including:
  - Universal projector interface
  - Wired hand held remote, for programming/service
  - Open contact interface, for connecting automations systems as Crestron, AMX or a wall switch
  - 60x40 cm ceiling finishing kit
- Max. lifting weight 15 kg / 33 lbs

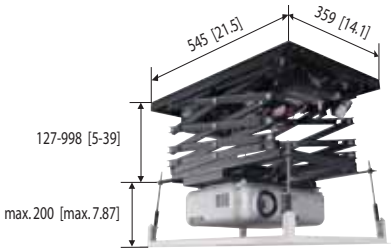

mm (inch)

PPL 2525
Projector lift system



130-500 mm / 5,1-19,6"

18 kg / 40 lbs (projector interface load)

●

- Max. drop down distance of 1.8 meter
- For small/medium size projectors
- Microprocessor operation with electronic height setting
- Whisper quiet operation
- 2 programable positions, show and service
- Including:
  - Universal projector interface
  - Wired hand held remote, for programming/service
  - Open contact interface, for connecting automations systems as Crestron, AMX or a wall switch
- Max. lifting weight 25 kg / 55 lbs of lift system

mm (inch)

Type nr.		Max.	Colour	Adjustability			Interface	Dropdown distance
				Tilt	Turn	Height		
PPL 1515	130-500 mm / 5,1-19,6"	15 kg / 33 lbs	●	✔	–	✔	Incl.	1 m
PPL 2525	130-500 mm / 5,1-19,6"	18 kg / 40 lbs *	●	✔	–	✔	Incl.	1.8 m

✔P = TüV for Professional use, ✔ = TüV

* Max. projector interface load, max. lifting weight PPL 2525 is 25 kg

Visit www.vogels.com for more information.

PPL 3535
Projector lift system

130-500 mm / 5,1-19.6"

MAX. 18 kg / 40 lbs (projector interface load)

●

- Max. drop down distance of 4.2 meter
- For medium/large size projectors
- Microprocessor operation with electronic height setting
- Whisper quiet operation
- 2 programable positions, show and service
- Including:
  - Universal projector interface
  - Wired hand held remote, for programming/service
  - Open contact interface, for connecting automations systems as Crestron, AMX or a wall switch
- Max. lifting weight 70 kg / 154 lbs of lift system

mm (inch)

PPL 7575
Projector lift system

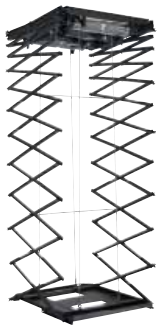

–

180 kg / 396 lbs (lifting capacity)

●

- Max. drop down distance of 7.2 metres
- For medium/large projectors
- Microprocessor operation with electronic height setting
- Whisper quiet operation
- 2 programmable position, show and service (home is fixed position)
- Including:
  - Wired hand held remote control for programming/service
  - Open contact interface for connecting automation systems as Crestron, AMX or a wall switch
- Max. lifting weight 180 kg / 896 lbs of lift system
- NOT INCLUDING special made interface (on request)

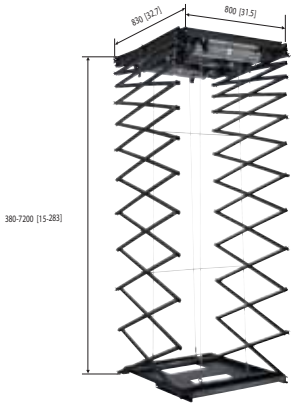

mm (inch)

Type nr.		Max.	Colour	Adjustability Tilt	Turn	Height	Interface	Dropdown distance
PPL 3535	130-500 mm / 5,1-19,6"	18 kg / 40 lbs *	●	✔	–	✔	Incl.	4.2 m
PPL 7575	–	180 kg / 396 lbs	●	✔	–	✔	Excl.	7.2 m

✔P = TüV for Professional use, ✔ = TüV

* Max. projector interface load, max. lifting weight PPL 3535 is 70 kg

Visit www.vogels.com for more information.

PPA 350
IR transmitter

- For use in combination with PPA 360
- Use as extra transmitter
- Use as replacement transmitter

PPA 360
IR Remote kit

- Can be used with all PPL lift systems
- IR sender, IR receiver, connection block and cable
- Lowered projector service position available with wireless remote
- No extra wiring needed, just plug it in

PPA 370
60x60 / 90x60 Ceiling finishing kit

○

- Use with PPL 1515 and PPL 2525
- Adjustable to grid size
- Two sets of strips to create 60 x 60 cm or 90 x 60 cm
- Frame is connected to the lift system with spring supported, adjustable rods

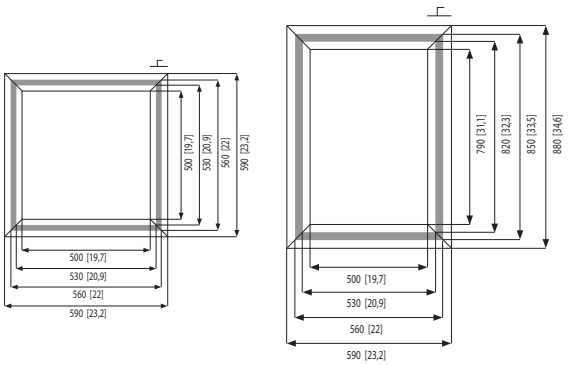

mm [inch]

PPA 380
90x60 / 90x90 Ceiling finishing kit

○

- Use with PPL 2525 and PPL 3535
- Adjustable to grid size
- Two sets of strips to create 90 x 60 cm or 90 x 90 cm
- Frame is connected to the lift system with spring supported, adjustable rods

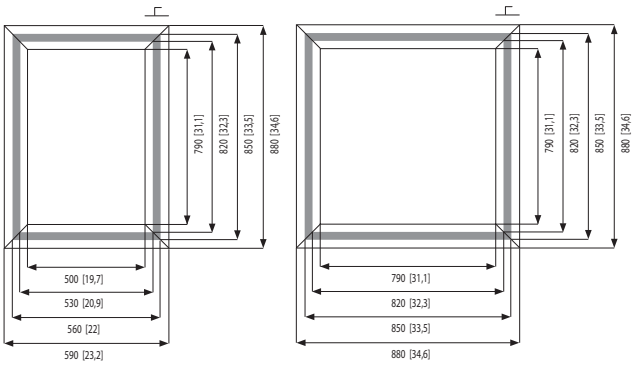

mm [inch]

Africa

Country	Importer	Telephone	E-mail	Website
ZA	Radionic Distributors Pty Ltd.	+27119151114	info@radionic.co.za	www.radionic.co.za
GH	Becks Engineering Services	+ 23321769933	becks@africaonline.com.gh	

Americas

AN	Boolchand's Curacao	+59994612262	boolchandcs@bgate.net	
	Boolchand's St Maarten	+5995422245	avinash@boolchands.com	
CL	Audio plus	+5622176466	ac@audioplus.cl	www.audioplus.cl
MX	Embodiment S.A. de C.V.	+525556688765	embodiment_mx@hotmail.com	
US+CA	Display Devices	+13034120399	sales@displaydevices.com	www.displaydevices.com
VZ	Electrodomesticos JVG Hogar C.A.	+582122868118	cesarj10@cantv.net	www.jvg.com

Asia-Pacific

AU	Canohm	+61396454700	sales@canohm.com	www.canohm.com.au
HK	Soundtronics Limited	+85225309939	info@soundtronics.com.hk	www.soundtronics.com.hk
IN	ARN Systems Pvt Ltd	+918041459999	info@arnsystems.com	www.arnsystems.com
JP	OS Co. Ltd	+81356970980	info@os-worldwide.com	www.osscreen.com
NZ	Mayo Group	+6494788853	jim@mayogroup.co.nz	www.mayogroup.co.nz
TW	Shouyo Electronics Co. Ltd	+886227995586	reishi@shouyo.com.tw	www.shouyo.com.tw

Middle East

AE	A&M Trading	+97167456680	naser@groupav.com	www.groupav.com
IL	Sirius Electronics Ltd	+97237355000	sel@sel.co.il	www.sel.co.il

Europe

AM	Zigzag	+37410545588	shahen@zigzag.am	www.zigzag.am
AT	Stefani Elektronik GmbH	+437229618710	info@stefani-elektronik.at	www.stefani-elektronik.at
AZ	Azel Azerbaijan Electronics	+944124974040	newmail@azel.net	www.azel.net
BE	Lucodex NV	+3238447282	admin@lucodex.be	www.lucodex.be
BG	Vigo	+35929290301	contact@vigo-bg.com	www.vigo-bg.com
CH	Telion AG	+41447321906	infoCPE@telion.ch	www.telion.ch
CY	MS Electronics	+35725580611	info@mstronics.com	www.mstronics.com
CZ	Easyco s.r.o.	+420261224555	vogels@easyco.cz	www.vogels.cz
DE	Schnepel GmbH & Co KG	+49574134610	profi@schnepel.com	www.schnepel.com
DK	Aurora Group Denmark A/S	+4544858200	info@auroragroup.dk	www.auroragroup.dk
EE	Sandman Group	+3726512200	info@sandman.ee	www.sandman.ee
ES	Vogel's Products Ibérica SLU	+34934869970	info.vps@vogels.com	www.vogels.com
FI	Aurora Group Finland Oy	+358207438060	info@auroragroup.fi	www.auroragroup.fi
FR	D.A.M.	+33164977400	dam@damdiff.com	www.dam-diffusion.com
GB	Vogel's Products UK	+443302020980	info.uk@vogels.com	www.vogels.com
GE	Zakhar LLC	+99532355639	zakharllc@gol.ge	
GR	Kinotechniki	+302109601071	info@kinotechniki.gr	www.kinotechniki.gr
HR	Dacco D.O.O.	+38512456666	darko.vekic@dacco.hr	www.dacco.hr
	TD Elektronika D.O.O.	+38512431555	td-elektronika@zg.tel.hr	www.td-elektronika.hr
HU	Steelbird	+3614637163	info@vogels.hu	www.vogels.hu
IE	Hi Fidelity Marketing	+35351424242	info@hifi.ie	www.hifi.ie
IS	Television Centre Ltd.	+3545689090	olafur@sm.is	www.sm.is
IT	Vogel's Products Italia S.r.l.	+390224420100	info.it@vogels.com	www.vogels.com
LT	Ogmina Ltd.	+37052741750	vaidotas.sabalys@ogmina.lt	www.ogmina.lt
	ACME Computer Components	+37037395006	audrius.kundelis@acme.lt	www.acc.acme.lt
LU	Lucodex NV	+3238447282	admin@lucodex.be	www.lucodex.be
LV	Latsat Ltd.	+3717813311	latsat@latsat.com	www.latsat.com
MT	YAL Home and Electronics	+35621419550	adriang@onvol.net	www.yalmalta.com
NL	Vogel's Professional Nederland	+31402647411	professional@vogels.com	www.vogels.com/professional
NO	Aurora Group Norway A/S	+4773829445	info@auroragroup.no	www.auroragroup.no
PL	Arkas Sp. Z o.o.	+48768711974	arkas@arkas.pl	www.arkas.pl
RO	VOG-Design Trade S.R.L.	+40213121909	office@vog-design.ro	www.vog-design.ro
RU	Optima Ltd.	+74957730553	info@vogels.ru	www.vogels.ru
SE	Aurora Group Sweden AB	+46856490850	info@auroragroup.se	www.auroragroup.se
SK	TT-Thais Trading	+421905429926	info@vogels.sk	www.vogels.sk
SL	Technotop	+38615461850	technotop@siol.net	
SR	Level Akustik doo	+38132227469	d.trajkovic@levelakustik.com	www.levelakustik.com
TR	Ertekin	+902122939515	ertekin@ertekin.com.tr	www.ertekin.com.tr
UA	Dumka	+380567782500	import@dumka.net.ua	www.dumka.net.ua

ARTICLE INDEX

Type nr.	Page	Type nr.	Page	Type nr.	Page
EFA 6825	44	PFA 9101	15	PPL 1515	74
EFA 6840	44	PFC 915	18	PPL 2525	74
EFW 1130	40	PFC 918	18	PPL 3535	75
EFW 6145	43	PFF 1000	51	PPL 7575	75
EFW 6245	43	PFF 1500	52	PPS 230	69
EFW 6345	43	PFF 1550	53	PPS 350	69
EFW 6445	44	PFF 1570	53	PPS 500	69
EFWE 6455 RC	45	PFF 2410	48	PPS 800	70
FAU 3125	22, 55	PFI 3010	14	PPS 801	70
FAU 3150	23, 55	PFI 3020	14	PPSA 100	71
FAU-D	22, 55	PFI 3030	14	PPSA 200	71
FAU-E	22	PFI 3040	15	PPT 2300	67
PB 050	56	PFT 2505	48	PTS 042S	59
PB 100	56	PFT 2510	48	PTS CB40S	58
PB 150	56	PFW 3220	37	PTS CB42S	59
PB 175	56	PFW 3230	37	PTS CL40S	58
PFA 9001	21, 54	PFW 3240	37	PTS CL42S	58
PFA 9002	21, 54	PFW 5000	33	PTS FAU	59
PFA 9003	20, 63	PFW 5005	33	PUA 9501	16
PFA 9004	20, 63	PFW 5010	33	PUA 9502	16
PFA 9005	19, 62	PFW 5015	35	PUC 1010	12
PFA 9006	24	PFW 5200	31	PUC 1030	12
PFA 9007	23	PFW 5205	31	PUC 1040	12
PFA 9008	24	PFW 5210	31	PUC 1050	13
PFA 9009	20, 63	PFW 5300	32	PUC 2108	13
PFA 9010	19, 62	PFW 5305	32	PUC 2115	13
PFA 9011	53	PFW 5310	32	PUC 2130	13
PFA 9015	20, 63	PFW 5500	34	PUC 2308	13
PFA 9016	20, 63	PFW 5505	34	PUC 2315	13
PFA 9017	29	PFW 5510	34	PUC 2330	13
PFA 9020	19, 62	PFW 5515	35	VFW 030	40
PFA 9021	24	PFW 910	27	VFW 032	41
PFA 9027	52	PFW 920	27	VFW 130	40
PFA 9028	23	PFW 930	27	VFW 132	41
PFA 9030	21	PFW 950	28	VFW 226	39
PFA 9031	29	PFW 952	28	VFW 326	39
PFA 9033	49, 67	PPA 305	64	VFW 426	39
PFA 9034	49, 67	PPA 301	64	VPC 545	63
PFA 9035	50	PPA 350	76		
PFA 9036	50	PPA 360	76		
PFA 9037	67	PPA 370	77		
PFA 9038	54	PPA 380	77		
PFA 9040	51	PPC 130	65		
PFA 9041	51	PPC 150	65		
PFA 9044	24	PPC 180	65		
PFA 9045	24	PPC 200	64		
PFA 9050	49	PPC 230	66		
PFA 9051	50	PPC 250	66		
PFA 9100	15	PPC 280	66		

CEILING

	Type nr.	Autolock®	Lock	Adjustability			CIS®	TüV	Interface	VESA	Pivot points	Distance to ceiling		Max.	Colour	Page
				Tilt	Turn	Height										
Small	**PFC 915**	-	-	✔	✔	✔	✔	✔P	incl.	MIS-D	1	457-740 mm	12-23" / 30-58 cm	12 kg / 26,4 lbs	●	18
	PFC 918	-	-	✔	✔	✔	✔	✔P	incl.	MIS-D	1	772-1346 mm	12-23" / 30-58 cm	12 kg / 26,4 lbs	●	18
	Connect-it modular products	-	-			-	-	-	excl.	MIS-D	1	800-1500-3000 mm	38 - 58 cm / 15-23"	30 kg / 66 lbs	● ●	10 t/m 16
Medium	**Modular single**	✔	PFA 9008	✔	✔	-	✔	✔P	excl.	MIS-D/E + 200x200	1	300-800-1500-3000 mm	23-40" / 58-101 cm	60 kg / 132 lbs	●	17
	Modular back-to-back	✔	PFA 9008	✔	✔	-	✔	✔P	excl.	MIS-D/E + 200x200	1	300-800-1500-3000 mm	23-40" / 58-101 cm	2x 60 kg / 2x 132 lbs	●	17
	Connect-it modular products	-	-			-	-	-	excl.	MIS-D / MIS-E + 200x200	1	800-1500-3000 mm	58 - 81 cm / 23-32"	30 kg / 66 lbs	● ●	10 t/m 16
Large	**Modular single**	✔	PFA 9008	✔	✔	-	✔	✔P	excl.	MIS-F	1	300-800-1500-3000 mm	30-65" / 76-165 cm	60 kg / 132 lbs	●	17
	Modular back-to-back	✔	PFA 9008	✔	✔	-	✔	✔P	excl.	MIS-F	1	300-800-1500-3000 mm	30-65" / 76-165 cm	2x 60 kg / 2x 132 lbs	●	17

*Under cabinet

**depending on application

WALL

	Type nr.	Autolock®	Lock	Adjustability			CIS®	TüV	Interface	VESA	Pivot points	Distance to wall		Max.	Colour	Page
				Tilt	Turn	Height										
Small	**VFW 030**	-	-	-	-	-	-	✔	incl.	MIS-D	-	26 mm	10-30" / 25-77 cm	30 kg / 66 lbs	●	40
	VFW 130	-	-	✔	-	-	-	✔	incl.	MIS-D	-	50 mm	10-30" / 25-77 cm	30 kg / 66 lbs	●	40
	VFW 226	padlock	-	✔	✔	-	-	✔	incl.	MIS-D + 200x100	1	70 mm	10-26" / 25-66 cm	15 kg / 33 lbs	●	39
	VFW 326	padlock	-	✔	✔	-	-	✔	incl.	MIS-D + 200x100	2	70-241 mm	10-26" / 25-66 cm	15 kg / 33 lbs	●	39
	VFW 426	padlock	-	✔	✔	-	-	✔	incl.	MIS-D + 200x100	3	70-410 mm	10-26" / 25-66 cm	15 kg / 33 lbs	●	39
	EFW 1130	-	padlock	✔	✔	✔	✔	-	incl.	MIS-D	3	-	10-24" / 25-61 cm	10/15 kg / 22/33 lbs	●	40
Medium	**VFW 032**	-	-	-	-	-	-	✔	incl.	MIS-D/E + 200x200	-	30 mm	23-37" / 57-94 cm	45 kg / 99 lbs	●	41
	VFW 132	-	-	✔	-	-	-	✔	incl.	MIS-D/E + 200x200	-	51 mm	23-37" / 57-94 cm	45 kg / 99 lbs	●	41
	PFW 3220	-	incl.	✔	✔	-	-	✔P	incl.	MIS-D/E + 200x200	1	133 mm	23-32" / 57-81 cm	32 kg / 70 lbs	◕	37
	PFW 3230	-	incl.	✔	✔	-	-	✔P	incl.	MIS-D/E + 200x200	2	109-334 mm	23-32" / 57-81 cm	32 kg / 70 lbs	◕	37
	PFW 3240	-	incl.	✔	✔	-	-	✔P	incl.	MIS-D/E + 200x200	3	109-537 mm	23-32" / 57-81 cm	32 kg / 70 lbs	◕	37
	PFW 5200	✔	-	-	-	-	-	✔P	incl.	MIS-F	-	34 mm	23-32" / 57-81 cm	75 kg / 165 lbs	●	31
	PFW 5205	✔	incl.	-	-	-	-	✔P	incl.	MIS-F	-	34 mm	23-32" / 57-81 cm	75 kg / 165 lbs	●	31
	PFW 5210	-	incl.	-	-	-	-	✔P	incl.	MIS-F	-	61 mm	23-32" / 57-81 cm	75 kg / 165 lbs	●	31
	PFW 5300	✔	-	-	-	-	-	✔P	incl.	MIS-F	-	34 mm	26-42" / 66-107 cm	75 kg / 165 lbs	●	32
	PFW 5305	✔	incl.	-	-	-	-	✔P	incl.	MIS-F	-	34 mm	26-42" / 66-107 cm	75 kg / 165 lbs	●	32
	PFW 5310	-	incl.	-	-	-	-	✔P	incl.	MIS-F	-	61 mm	26-42" / 66-107 cm	75 kg / 165 lbs	●	32
	PFW 910 (+ FAU 3125)	✔	-	-	-	-	-	✔P	excl.	MIS-D/E + 200x200	-	18 mm	23-40" / 58-101 cm	60 kg / 132 lbs	● ●	27
	PFW 920 (+ FAU 3125)	✔	PFA 9008	✔	-	-	-	✔P	excl.	MIS-D/E + 200x200	-	36 mm	23-40" / 58-101 cm	60 kg / 132 lbs	● ●	27
	PFW 930 (+ FAU 3125)	✔	PFA 9008	✔	✔	-	✔	✔P	excl.	MIS-D/E + 200x200	2	82-320 mm	23-40" / 58-101 cm	60 kg / 132 lbs	●	27
	PFW 950 (+ FAU 3125)	✔	PFA 9008	✔	✔	-	✔	✔P	excl.	MIS-D/E + 200x200	1	720 mm	23-40" / 58-101 cm	60 kg / 132 lbs	●	28
	PFW 952 (+ FAU 3125)	✔	PFA 9008	✔	-	-	✔	✔P	excl.	MIS-D/E + 200x200	1	720 mm	23-40" / 58-101 cm	2x 60 kg / 2x 132 lbs	●	28
Large	**PFW 5000**	✔	-	-	-	-	-	✔P	incl.	MIS-F	-	34 mm	37-50" / 94-127 cm	75 kg / 165 lbs	●	33
	PFW 5005	✔	incl.	-	-	-	-	✔P	incl.	MIS-F	-	34 mm	37-50" / 94-127 cm	75 kg / 165 lbs	●	33
	PFW 5010	-	incl.	✔	-	-	-	✔P	incl.	MIS-F	-	61 mm	37-50" / 94-127 cm	75 kg / 165 lbs	●	33
	PFW 5015 Portrait	✔	incl.	-	-	-	-	✔P	incl.	MIS-F	-	34 mm	37-50" / 94-127 cm	75 kg / 165 lbs	●	35
	PFW 5515 Portrait	✔	incl.	-	-	-	-	✔P	incl.	MIS-F	-	34 mm	50-65" / 127-165 cm	75 kg / 165 lbs	●	35
	EFWE 6455 RC	-	-	-	✔	-	✔	✔	incl.	MIS-F	1	105 mm	42-60" / 107-153 cm	70 kg / 154 lbs	◕	45
	PFW 910 (+ FAU 3150)	✔	-	-	-	-	-	✔P	excl.	MIS-F	-	18 mm	30-65" / 76-165 cm	60 kg / 132 lbs	● ●	27
	PFW 920 (+ FAU 3150)	✔	PFA 9008	✔	-	-	-	✔P	excl.	MIS-F	-	36 mm	30-65" / 76-165 cm	60 kg / 132 lbs	● ●	27
	PFW 930 (+ FAU 3150)	✔	PFA 9008	✔	✔	-	✔	✔P	excl.	MIS-F	2	82-320 mm	30-65" / 76-165 cm	60 kg / 132 lbs	●	27
	PFW 950 (+ FAU 3150)	✔	PFA 9008	✔	✔	-	✔	✔P	excl.	MIS-F	1	720 mm	30-42" / 76-107 cm	60 kg / 132 lbs	●	28
	PFW 952 (+ FAU 3150)	✔	PFA 9008	✔	-	-	✔	✔P	excl.	MIS-F	1	720 mm	30-42" / 76-107 cm	2x 60 kg / 2x 132 lbs	●	28
Extra large + XXL	**PFW 5500**	✔	-	-	-	-	-	✔P	incl.	MIS-F	-	34 mm	50-70" / 127-178 cm	75 kg / 165 lbs	●	34
	PFW 5505	✔	incl.	-	-	-	-	✔P	incl.	MIS-F	-	34 mm	50-70" / 127-178 cm	75 kg / 165 lbs	●	34
	PFW 5510	-	incl.	✔	-	-	-	✔P	incl.	MIS-F	-	61 mm	50-70" / 127-178 cm	75 kg / 165 lbs	●	34
6000 Series																
Small	**EFW 6145**	-	-	✔	✔	-	✔	✔	incl.	MIS-D+200x100	1	68-340 mm	14-26" / 35-66 cm	3-15 kg / 6-33 lbs	◕	43
Medium	**EFW 6245**	-	-	✔	✔	-	✔	✔	incl.	MIS-D/E+200x200	1	94-461 mm	23-37" / 57-94 cm	10-35 kg / 22-77 lbs	◕	43
Large	**EFW 6345**	-	-	✔	✔	-	✔	✔	incl.	MIS-F	1	98-600 mm	32-50" / 81-127 cm	15-45 kg / 33-99 lbs	◕	43
XL	**EFW 6445**	-	-	✔	✔	-	✔	✔	incl.	MIS-F	1	108-610 mm	42-65" / 107-165 cm	15-55 kg / 33-121 lbs	◕	44

Visit www.vogels.com for more information.

✔P = TüV for Professional use

✔ = TüV

FLOOR/TABLE

	Type nr.	Autolock®	Lock	Adjustability			CIS®	TüV	Interface	VESA	Pivot points		Max.	Colour	Page
				Tilt	Turn	Height									
Table	**PB 050**	-	-	✔	✔	✔	✔	-	incl.	MIS-D	3	36-42" / 92-107 cm	50 kg / 110 lbs	●	56
	EFW 1130	-	padlock	-	-	-	-	-	incl.	MIS-F	-	10-24" / 25-61 cm	10/15 kg / 22/33 lbs	●	40
Trolleys	**PB 175**	-	-	-	-	-	-	-	incl.	MIS-F	-	36-50" / 92-127 cm	50 kg / 110 lbs	◕	56
	PB 150	-	-	-	-	-	-	-	incl.	MIS-F	-	36-50" / 92-127 cm	50 kg / 110 lbs	◕	56
	PB 100	-	-	-	-	-	-	-	incl.	MIS-F	-	36-50" / 92-127 cm	50 kg / 110 lbs	◕	56
	PFF 2410	✔	-	-	-	✔	✔	✔P	excl.	-	-	32-65" / 81-165 cm	70 kg / 154 lbs	◕	48
	PFT 2505	✔	-	✔	-	✔	✔	✔P	excl.	-	-	32-65" / 81-165 cm	70 kg / 154 lbs	◕	48
	PFT 2510	✔	-	-	-	✔	✔	✔P	excl.	-	-	32-55" / 81-140 cm	55 kg / 121 lbs	◕	48
Stands	**PFF 1000**	-	-	✔	-	-	✔	-	incl.	MIS-D-E + 200x200mm	-	15-26" / 38-66 cm	15 kg / 33 lbs	◕	51
	PFF 1500	✔	PFA 9008	-	-	✔	✔	✔P	excl.	-	-	31-42" / 78-107 cm	40 kg / 88 lbs	●	52
	PFF 1550	-	-	✔	✔	-	✔	✔P	excl.	-	1	19-50" / 48-127 cm	45 kg / 100 lbs	●	53
	PFF 1570	-	-	✔	✔	-	✔	✔P	excl.	-	1	19-42" / 48-107 cm	40 kg / 88 lbs	●	53
	PFA 9011	-	-	✔	✔	-	✔	✔P	excl.	-	1	19-65" / 48-165 cm	60 kg / 132 lbs	●	53

Visit www.vogels.com for more information.

✔P = TüV for Professional use
✔ = TüV

VOGEL'S TVskin® PRODUCT OVERVIEW

Type	Monitor position		Weight (excl. interface)		Material			Ventilation opening	Maximum monitor size	Colour	Page
	Landscape	Portrait	Front	Back	Front	Back	Interface		W x H x D		
PTS CL40S	✔	✔	8 kg	9 kg	1.25 mm Steel	1.25 mm Steel	2 mm Steel	690 cm^2	106 x 66 x 15 cm	● ○ ◐	58
PTS CL42S	✔	✔	8 kg	9 kg	1.25 mm Steel	1.25 mm Steel	2 mm Steel	690 cm^2	106 x 66 x 15 cm	● ○ ◐	58
PTS CB40S	✔	✔	8 kg	9 kg	1.25 mm Steel	1.25 mm Steel	2 mm Steel	690 cm^2	106 x 66 x 15 cm	● ○ ◐	58
PTS CB42S	✔	✔	8 kg	9 kg	1.25 mm Steel	1.25 mm Steel	2 mm Steel	690 cm^2	106 x 66 x 15 cm	● ○ ◐	59

Visit www.vogels.com/tvskin for more information.

CEILING

Type nr.	Adjustability			CIS®	TüV	Interface	Modular	Can be combined with			Distance to ceiling	Max.	Colour	Page
	Tilt	Roll	Height					PFA 9010	PFA 9003/04/15/16	PPA 305/301				
VPC 545	✔	✔	-	-	✔P	incl.	✔	✔	✔	✔	110 mm	10 kg / 22 lbs	●	63
PPC 130	✔	✔	✔	✔	✔P	incl.	-	-	-	-	309-398 mm	10 kg / 22 lbs	●	65
PPC 150	✔	✔	✔	✔	✔P	incl.	-	-	-	-	531-804 mm	10 kg / 22 lbs	●	65
PPC 180	✔	✔	✔	✔	✔P	incl.	-	-	-	-	829-1404 mm	10 kg / 22 lbs	●	65
PPC 200	✔	✔	-	-	✔P	incl.	✔	✔	✔	✔	121 mm	20 kg / 44 lbs	●	64
PPC 230	✔	✔	✔	✔	✔P	incl.	-	-	-	-	319-408 mm	20 kg / 44 lbs	●	66
PPC 250	✔	✔	✔	✔	✔P	incl.	-	-	-	-	540-814 mm	20 kg / 44 lbs	●	66
PPC 280	✔	✔	✔	✔	✔P	incl.	-	-	-	-	840-1414 mm	20 kg / 44 lbs	●	66

WALL / SHORT THROW

Type nr.	Adjustability						CIS®	TüV	Interface	Distance to wall	Max.	Colour	Page
	Swivel	Tilt	Turn	Height	Dept	Fine adjust							
PPS 230	-	✔	✔	✔	✔	✔	✔	✔P	incl.	320-380 mm	10 kg / 22 lbs	◕	69
PPS 350	-	✔	✔	✔	✔	✔	✔	✔P	incl	440-620 mm	10 kg / 22 lbs	◕	69
PPS 500	-	✔	✔	✔	✔	✔	✔	✔P	incl.	590-920 mm	10 kg / 22 lbs	◕	69
PPS 800	-	✔	✔	✔	✔	✔	✔	✔P	incl.	890-1520 mm	10 kg / 22 lbs	◔ ◕	70
PPS 801	✔	✔	✔	✔	✔	✔	✔	✔P	incl.	1012-1556 mm	10 kg / 22 lbs	◕	70

FLOOR

Type nr.	Lock	Adjustability			CIS®	TüV	Interface	Distance to floor	Max.	Colour	Page
		Tilt	Turn	Height							
PPT 2300	PFA 9037	✔	✔	✔	✔	✔P	not required	84-122 cm	25 kg / 55 lbs	◕	67

✔P = TüV for Professional use
✔ = TüV

PROJECTOR LIFT SYSTEMS

CEILING

Type nr.	Adjustability			CIS®	TüV	Interface	Distance to ceiling	Max.	Colour	Page
	Tilt	Roll	Height							
PPL 1515	✔	✔	✔	✔	-	incl.	max. 1 m	15 kg	●	74
PPL 2525	✔	✔	✔	✔	-	incl.	max. 1.8 m	25 kg*	●	74
PPL 3535	✔	✔	✔	✔	-	incl.	max. 4.2 m	70 kg*	●	75
PPL 7575	✔	✔	✔	✔	-	excl.	max. 7.2 m	180 kg	●	75

Visit www.vogels.com for more information.

* Max lifting weight liftsystem.
Max weight projector interface is 18 kg.

vogel's®
Professional

Mounting solutions for flat displays and projectors

WWW.VOGELS.COM

PX 70210 © 05/2010 Vogel's Holding BV 2010 © all rights reserved.